


BOX fc  
INTILED




BOX is a new family of floodlighting  
and accent projectors for façade lighting




SPOT



KUB

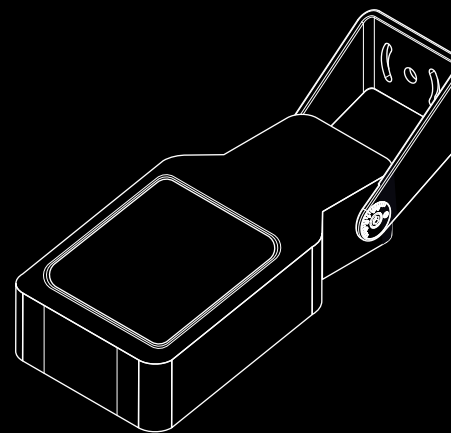


RAY

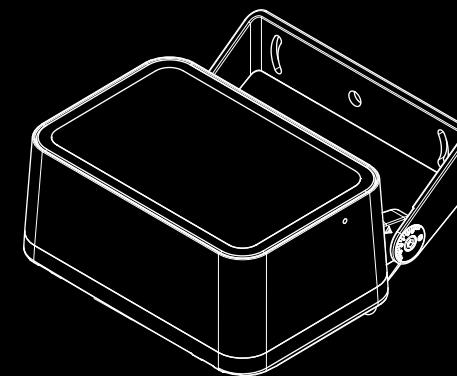


BOX


BOX family will be introduced in several versions:  
30 W, 50 W, 100 W, 200 W. 50-W version  
is presented first

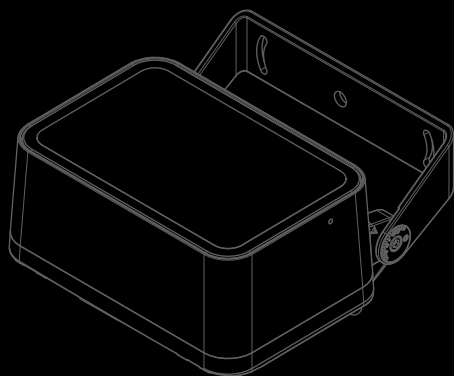


30 W

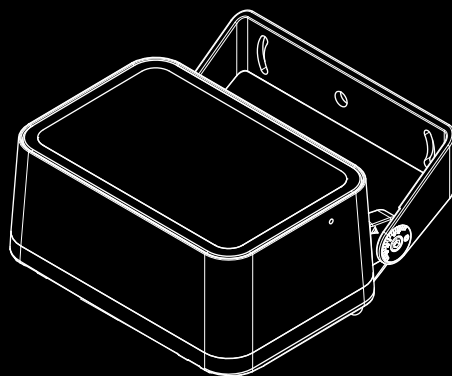

50 W

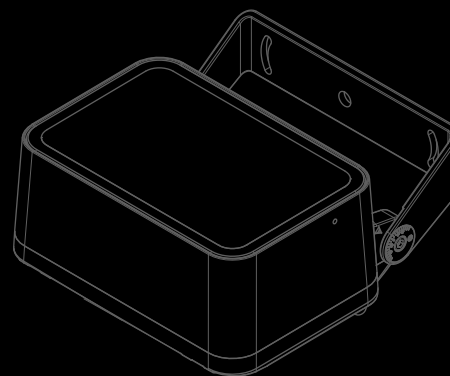

100 W

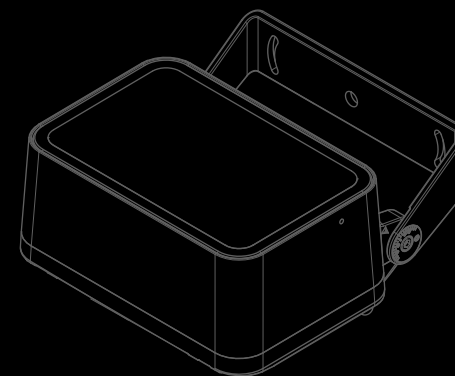

200 W

BOX is a luminaire where all INTILED technical solutions are balanced inside of the compact housing



ColorPro® technology in color versions provide maximum brightness of each color in a dynamic modes, keeping the energy consumption stable

EternalTechnology® in all BOX versions helps avoiding critical overheating or overcooling of the components and extends the lifespan of the product

Well-thought-out mounting system: a combination of special-shaped bracket, adjusting scale and Nord-Lock® system provides fast and precise mounting and makes the service easier


Perfect lighting effect in any of BOX versions




**Architectural lighting**

**Accent lighting**


sliding  
15°

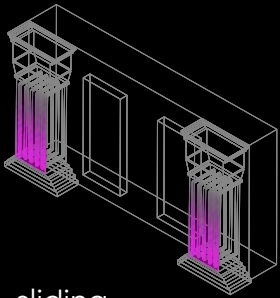

sliding  
15x60°, 10α30°

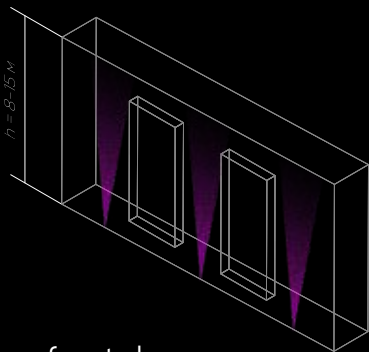


frontal  
15°




**Flood lighting**


façade  
15°, 30°, 65°, 85°

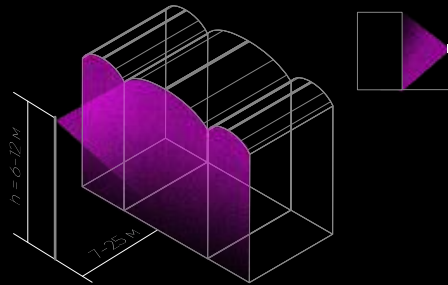

uniform illumination  
façade  
35x105°

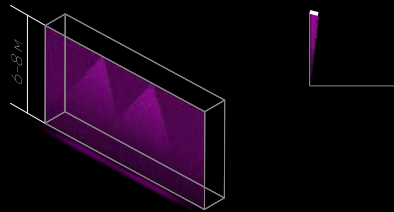


uniform illumination  
façade and ground  
15x60°

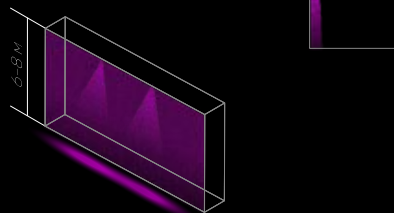


**Landscape lighting**

**Flood lighting**

sliding  
10α30°, 30°, 65°

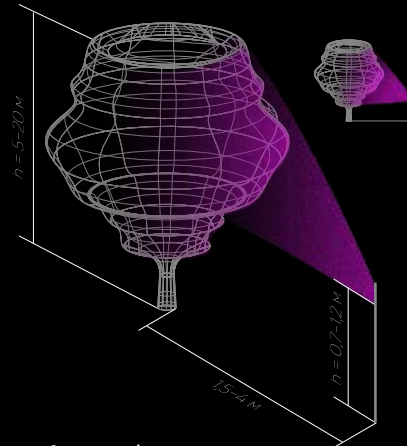


frontal  
10α30°, 30°, 65°

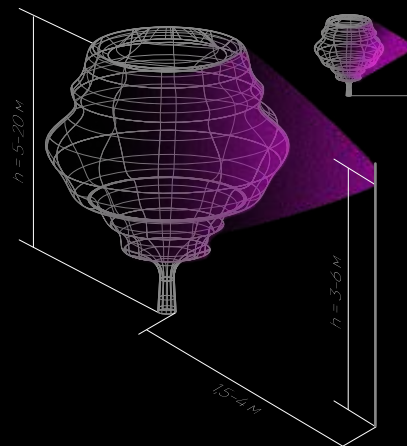


**Functional lighting**

**Flood lighting**

sliding area lighting  
35x105°


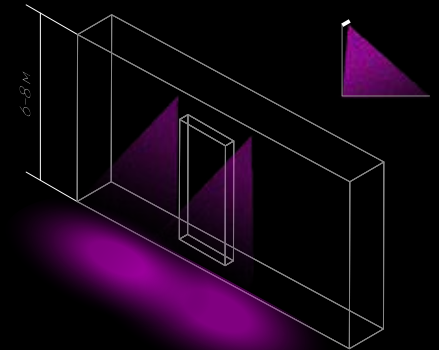


sliding building lighting  
and area  
65°

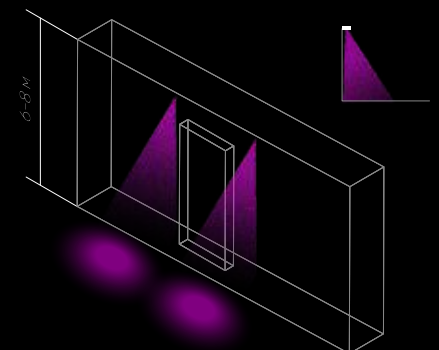


# BOX fc DIMENSIONAL DRAWING

I N T I L E D

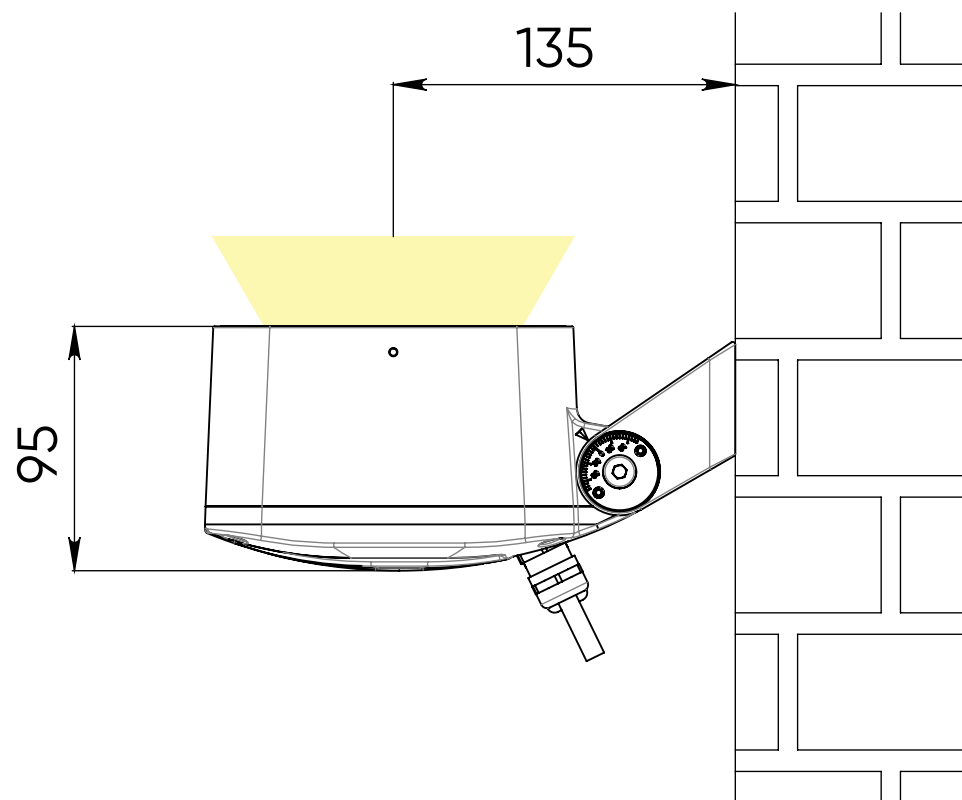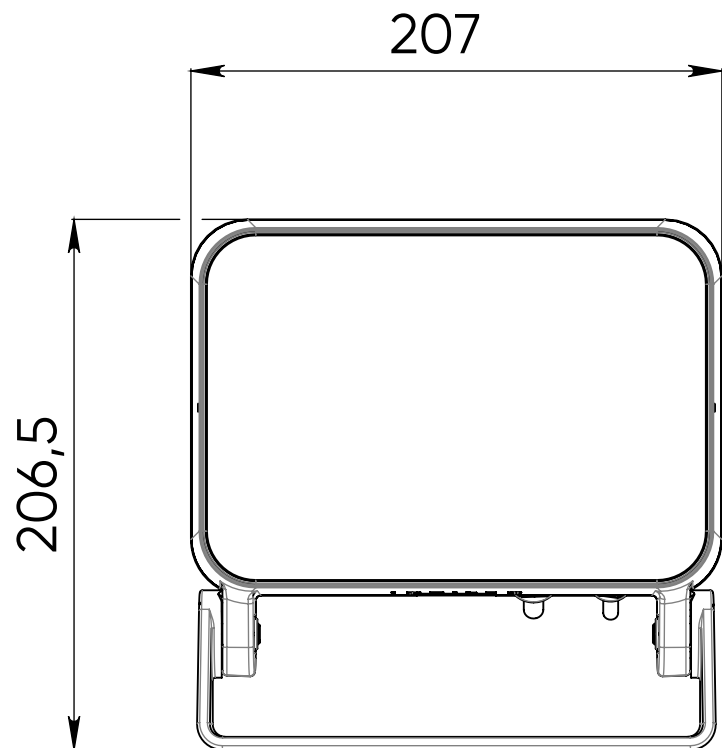

# BOX fc CONNECTION DIAGRAM

I N T I L E D

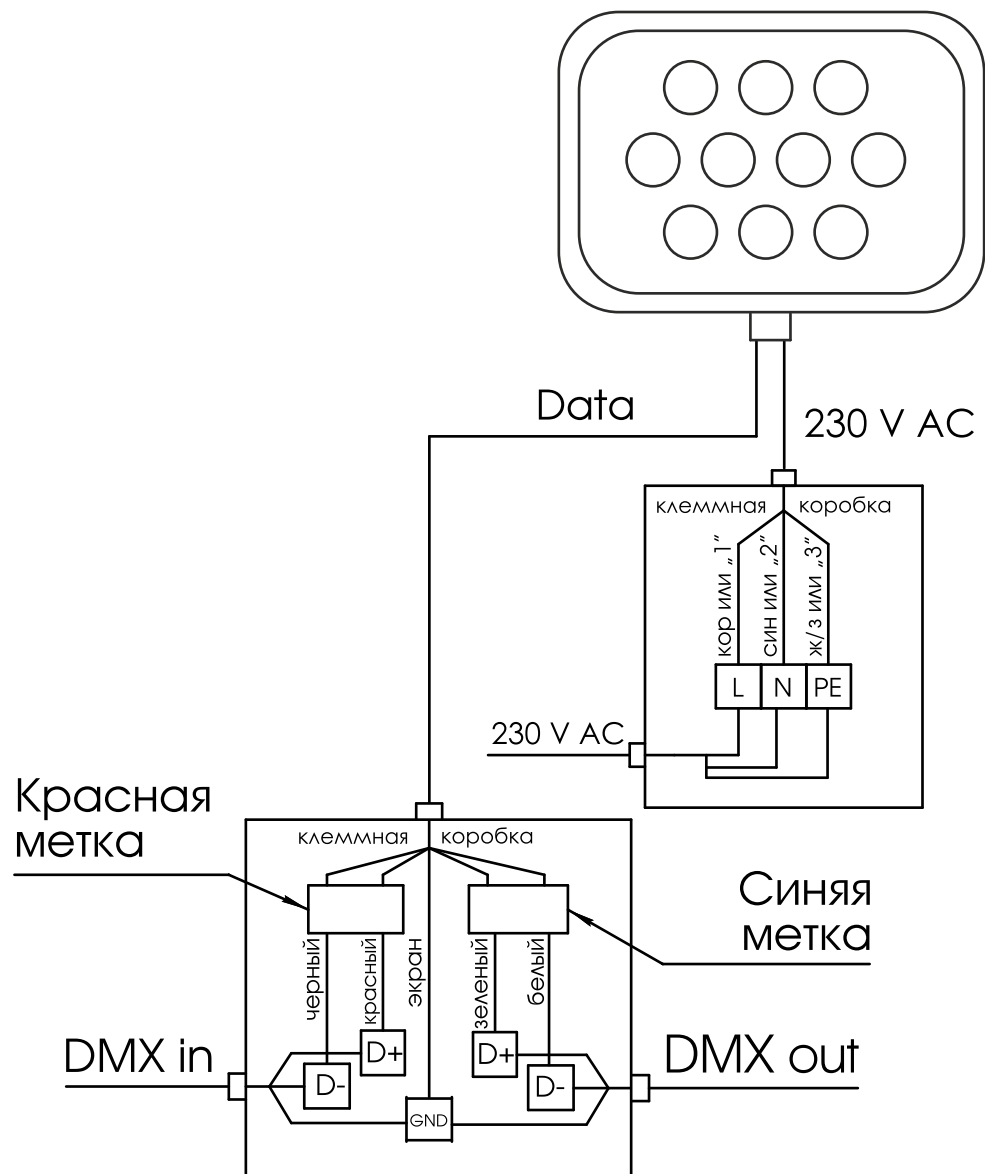



Light color	fullcolor (R+G+B+W40)
Optics	15°, 30°, 60°, 125°, 15x60°
Lumen output	1200 lm
Control	DMX-512, DMX-512+RDM
Wattage	50 W, 60 W
Voltage	230 V AC
Protection class	IP66/IP67
Pulsation coefficient	<1%
Mechanical resistance	IK08
Operating temperature	-40°C ... +55°C
Lifespan	not less than 50 000 hours
Dimensions	207x147x95 – without bracket 207x206,5x95 – with bracket
Weight	4 kg
Materials	housing, bracket – die-cast aluminum; diffusor – tempered glass
Contents of delivery	luminaire, passport, package

# COMPARISON BETWEEN DIFFERENT SERIES OF PRODUCTS

INTILED

SPOT



IntiSPOT




KUB



RAY




BOX

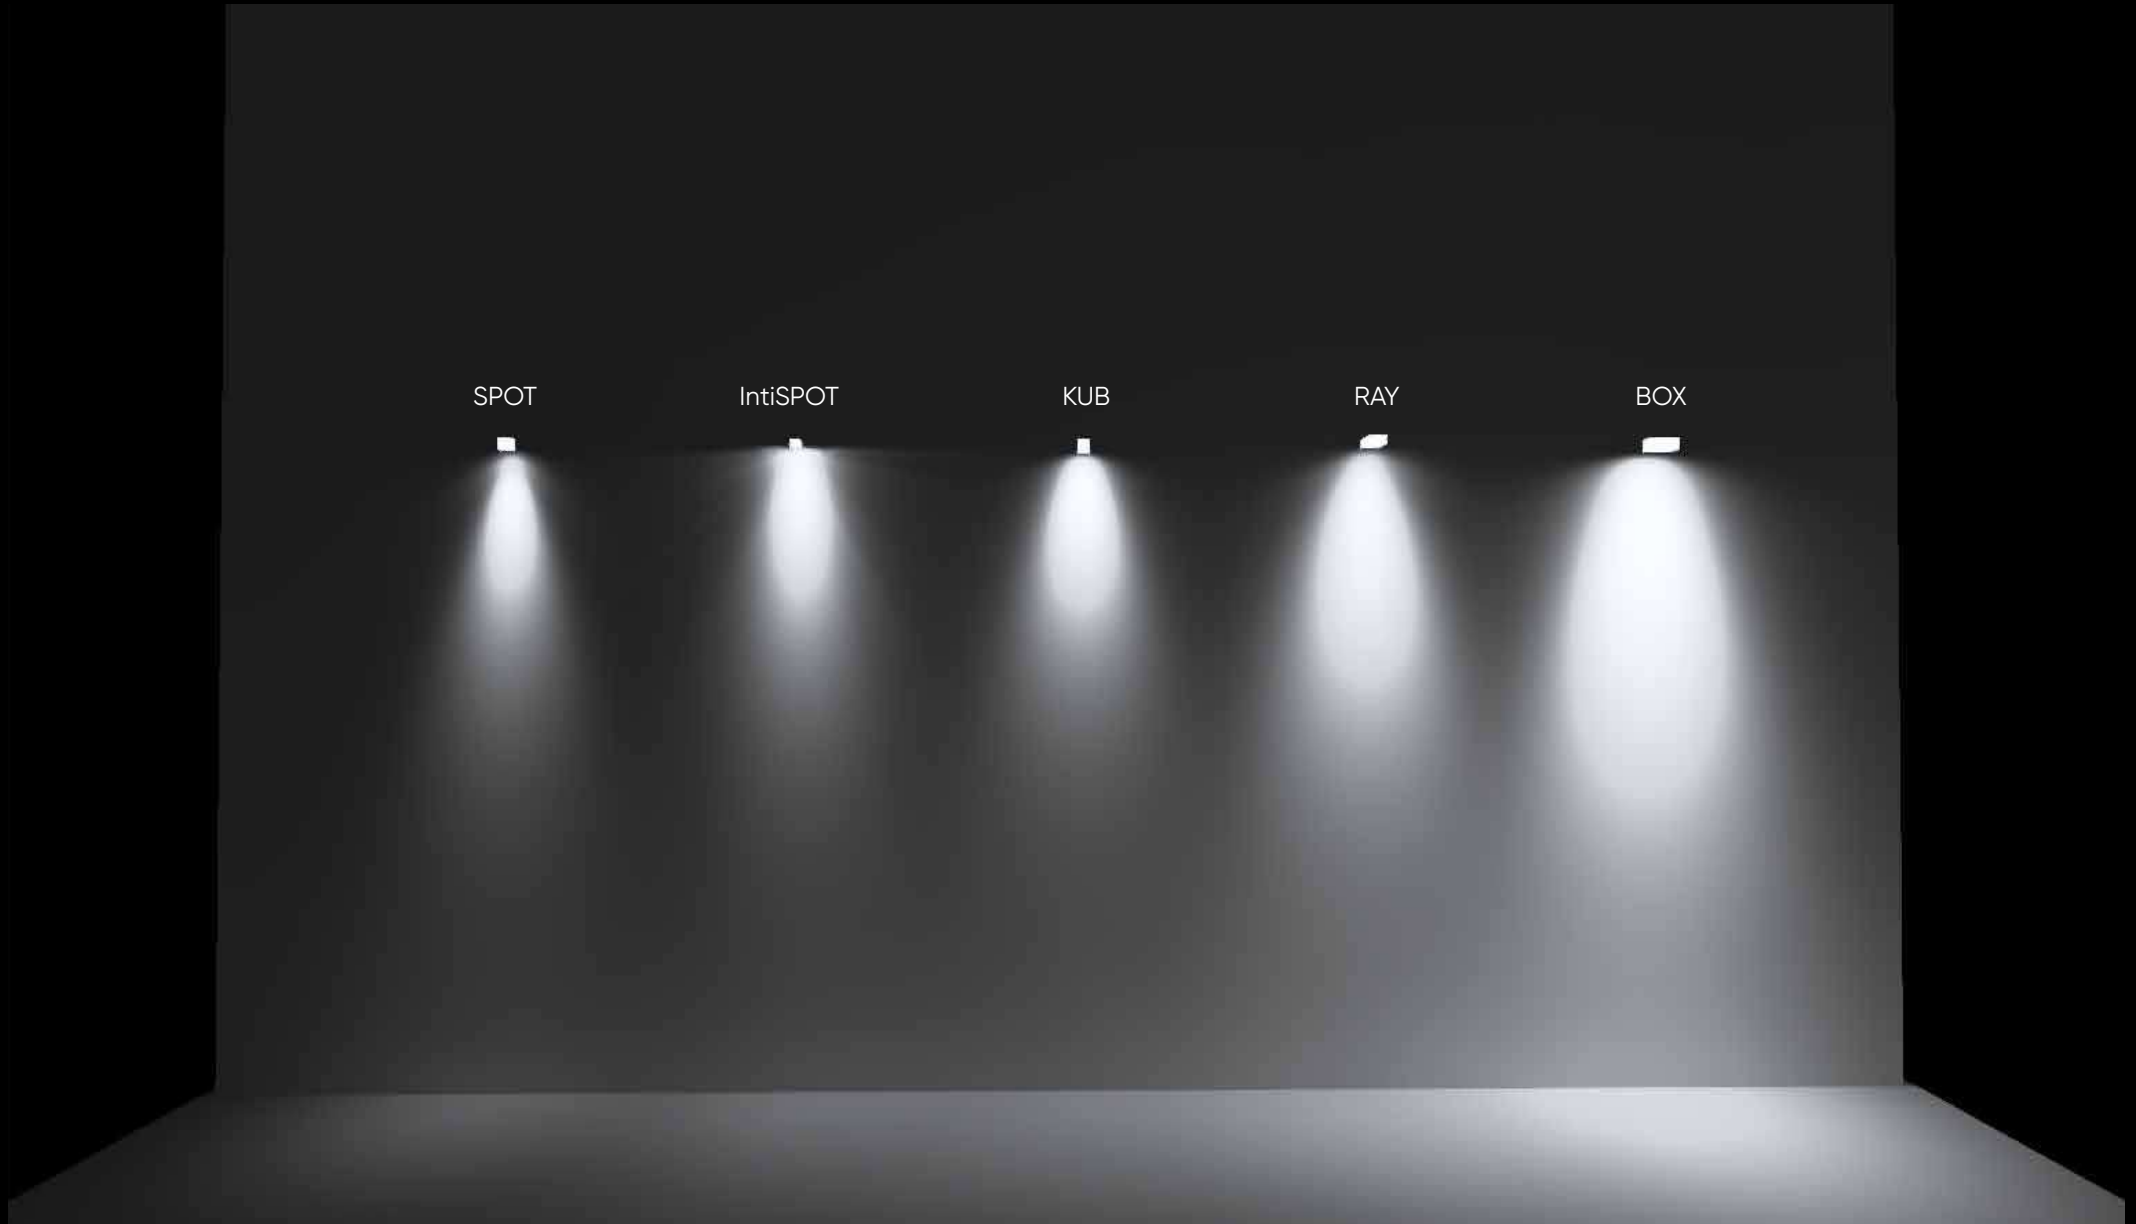

# COMPARISON BETWEEN DIFFERENT SERIES OF PRODUCTS. ILLUMINANCE

INTILED

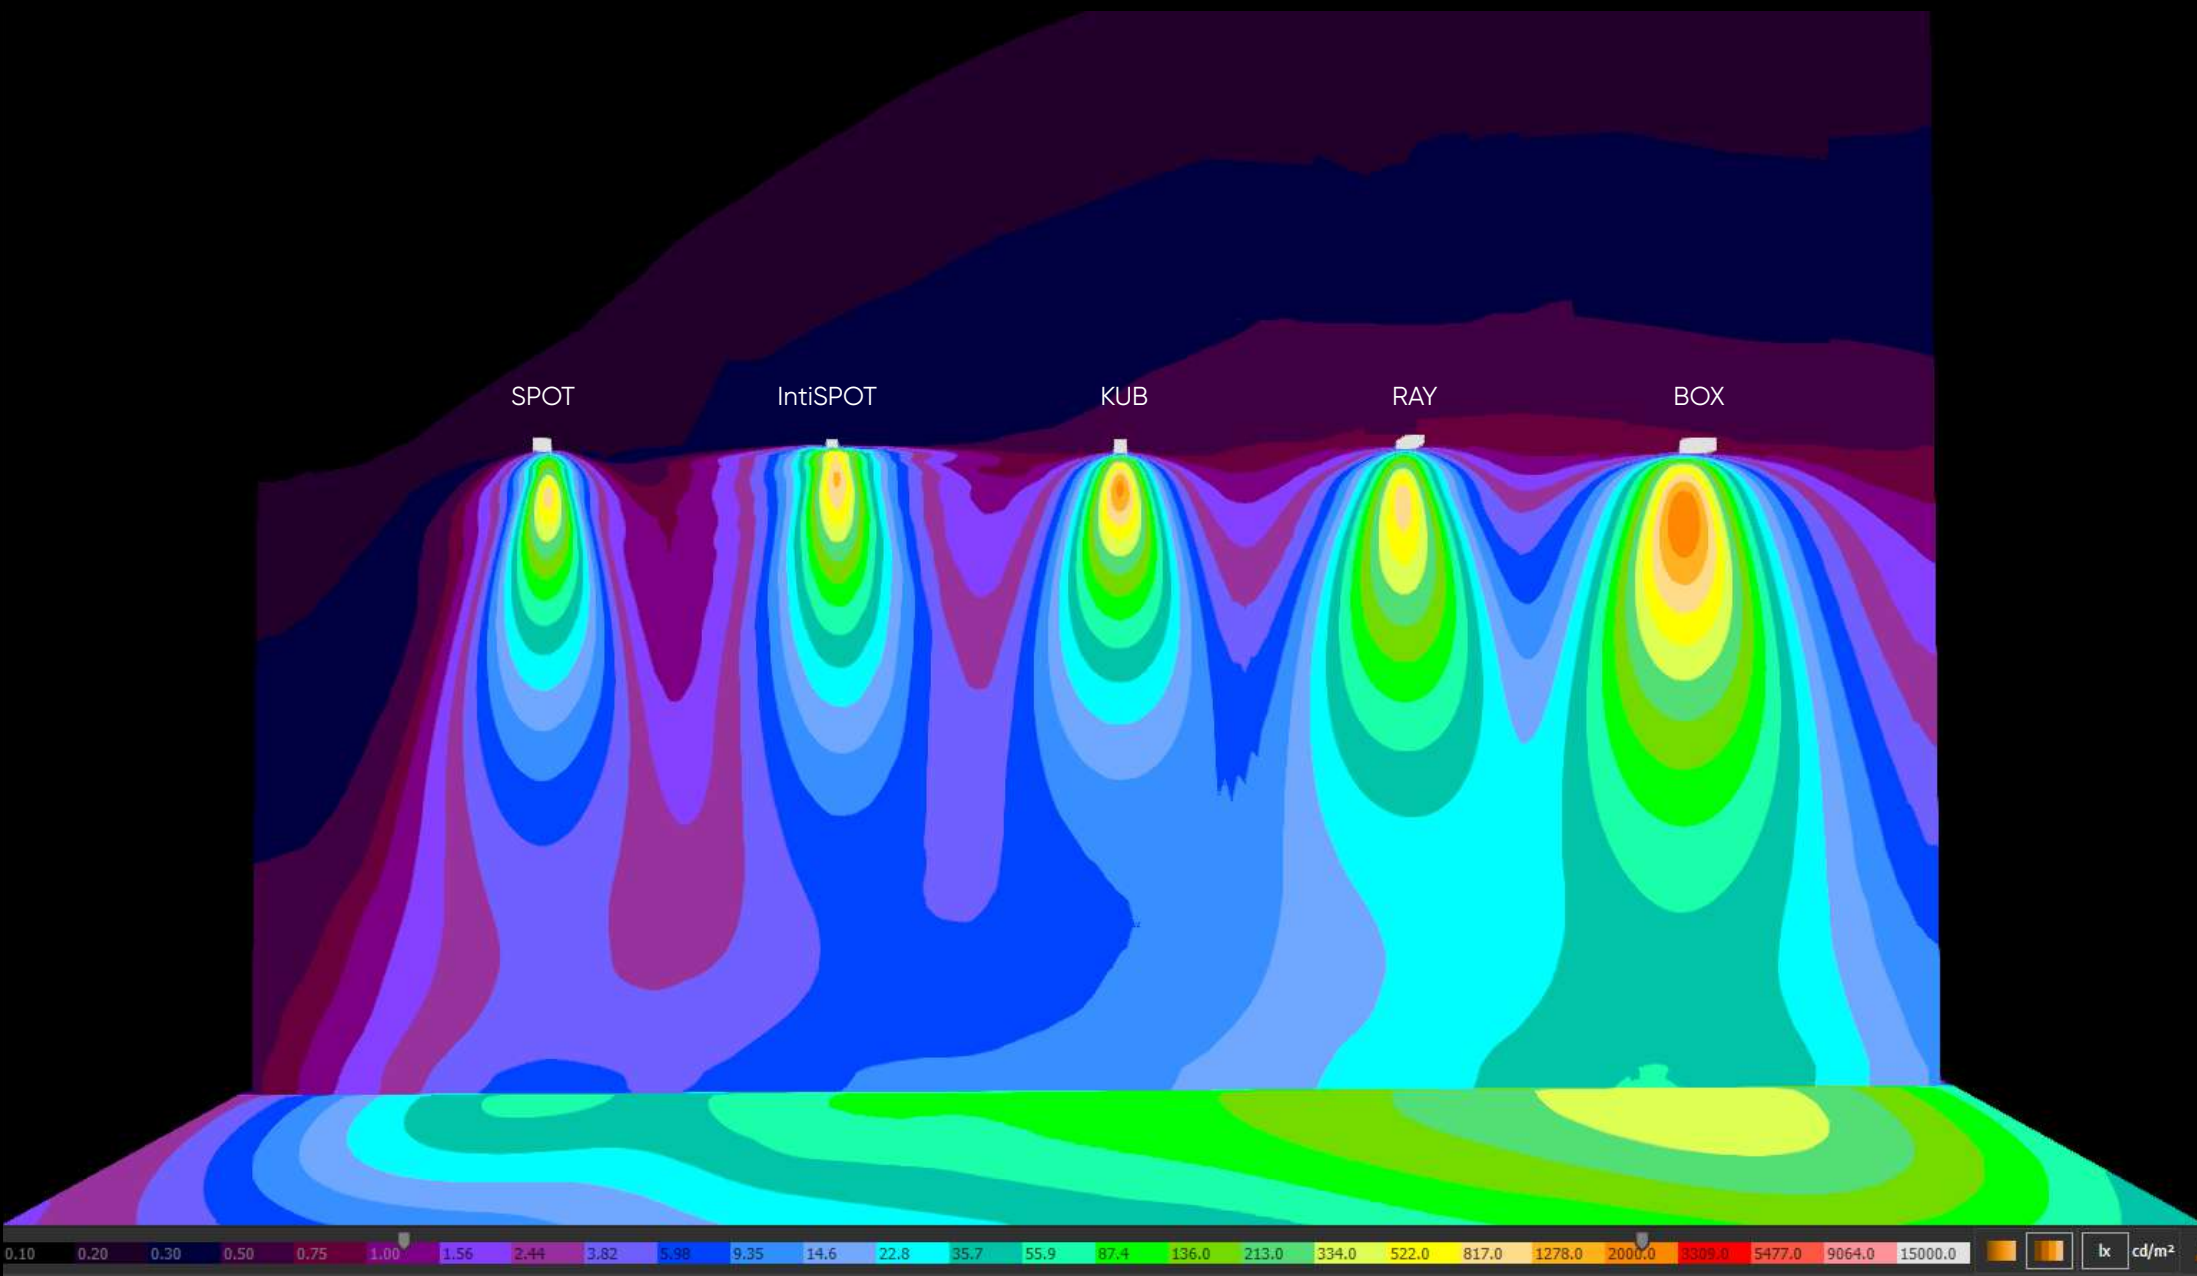

more info

