

IntiPOINT

INTILED



INTIPOINT SPECIFIC DESCRIPTION

I N T I L E D

High-brightness pointed luminaire
for creating decorative lighting effects
and media facades



Cable switching

The luminaire housing allows to use various cable output and switching options: side/bottom



Bayonet-type mount

The wall bracket system ensures an easy and secure mounting, while the hidden fastening screw is completely inconspicuous



INTIPOINT SPECIFIC DESCRIPTION

I N T I L E D


Different mounting options

IntiPOINT can be both surface-mounted and recessed





Different diffuser types

Different duffusers allow to create a variety of lighting effects on the facade



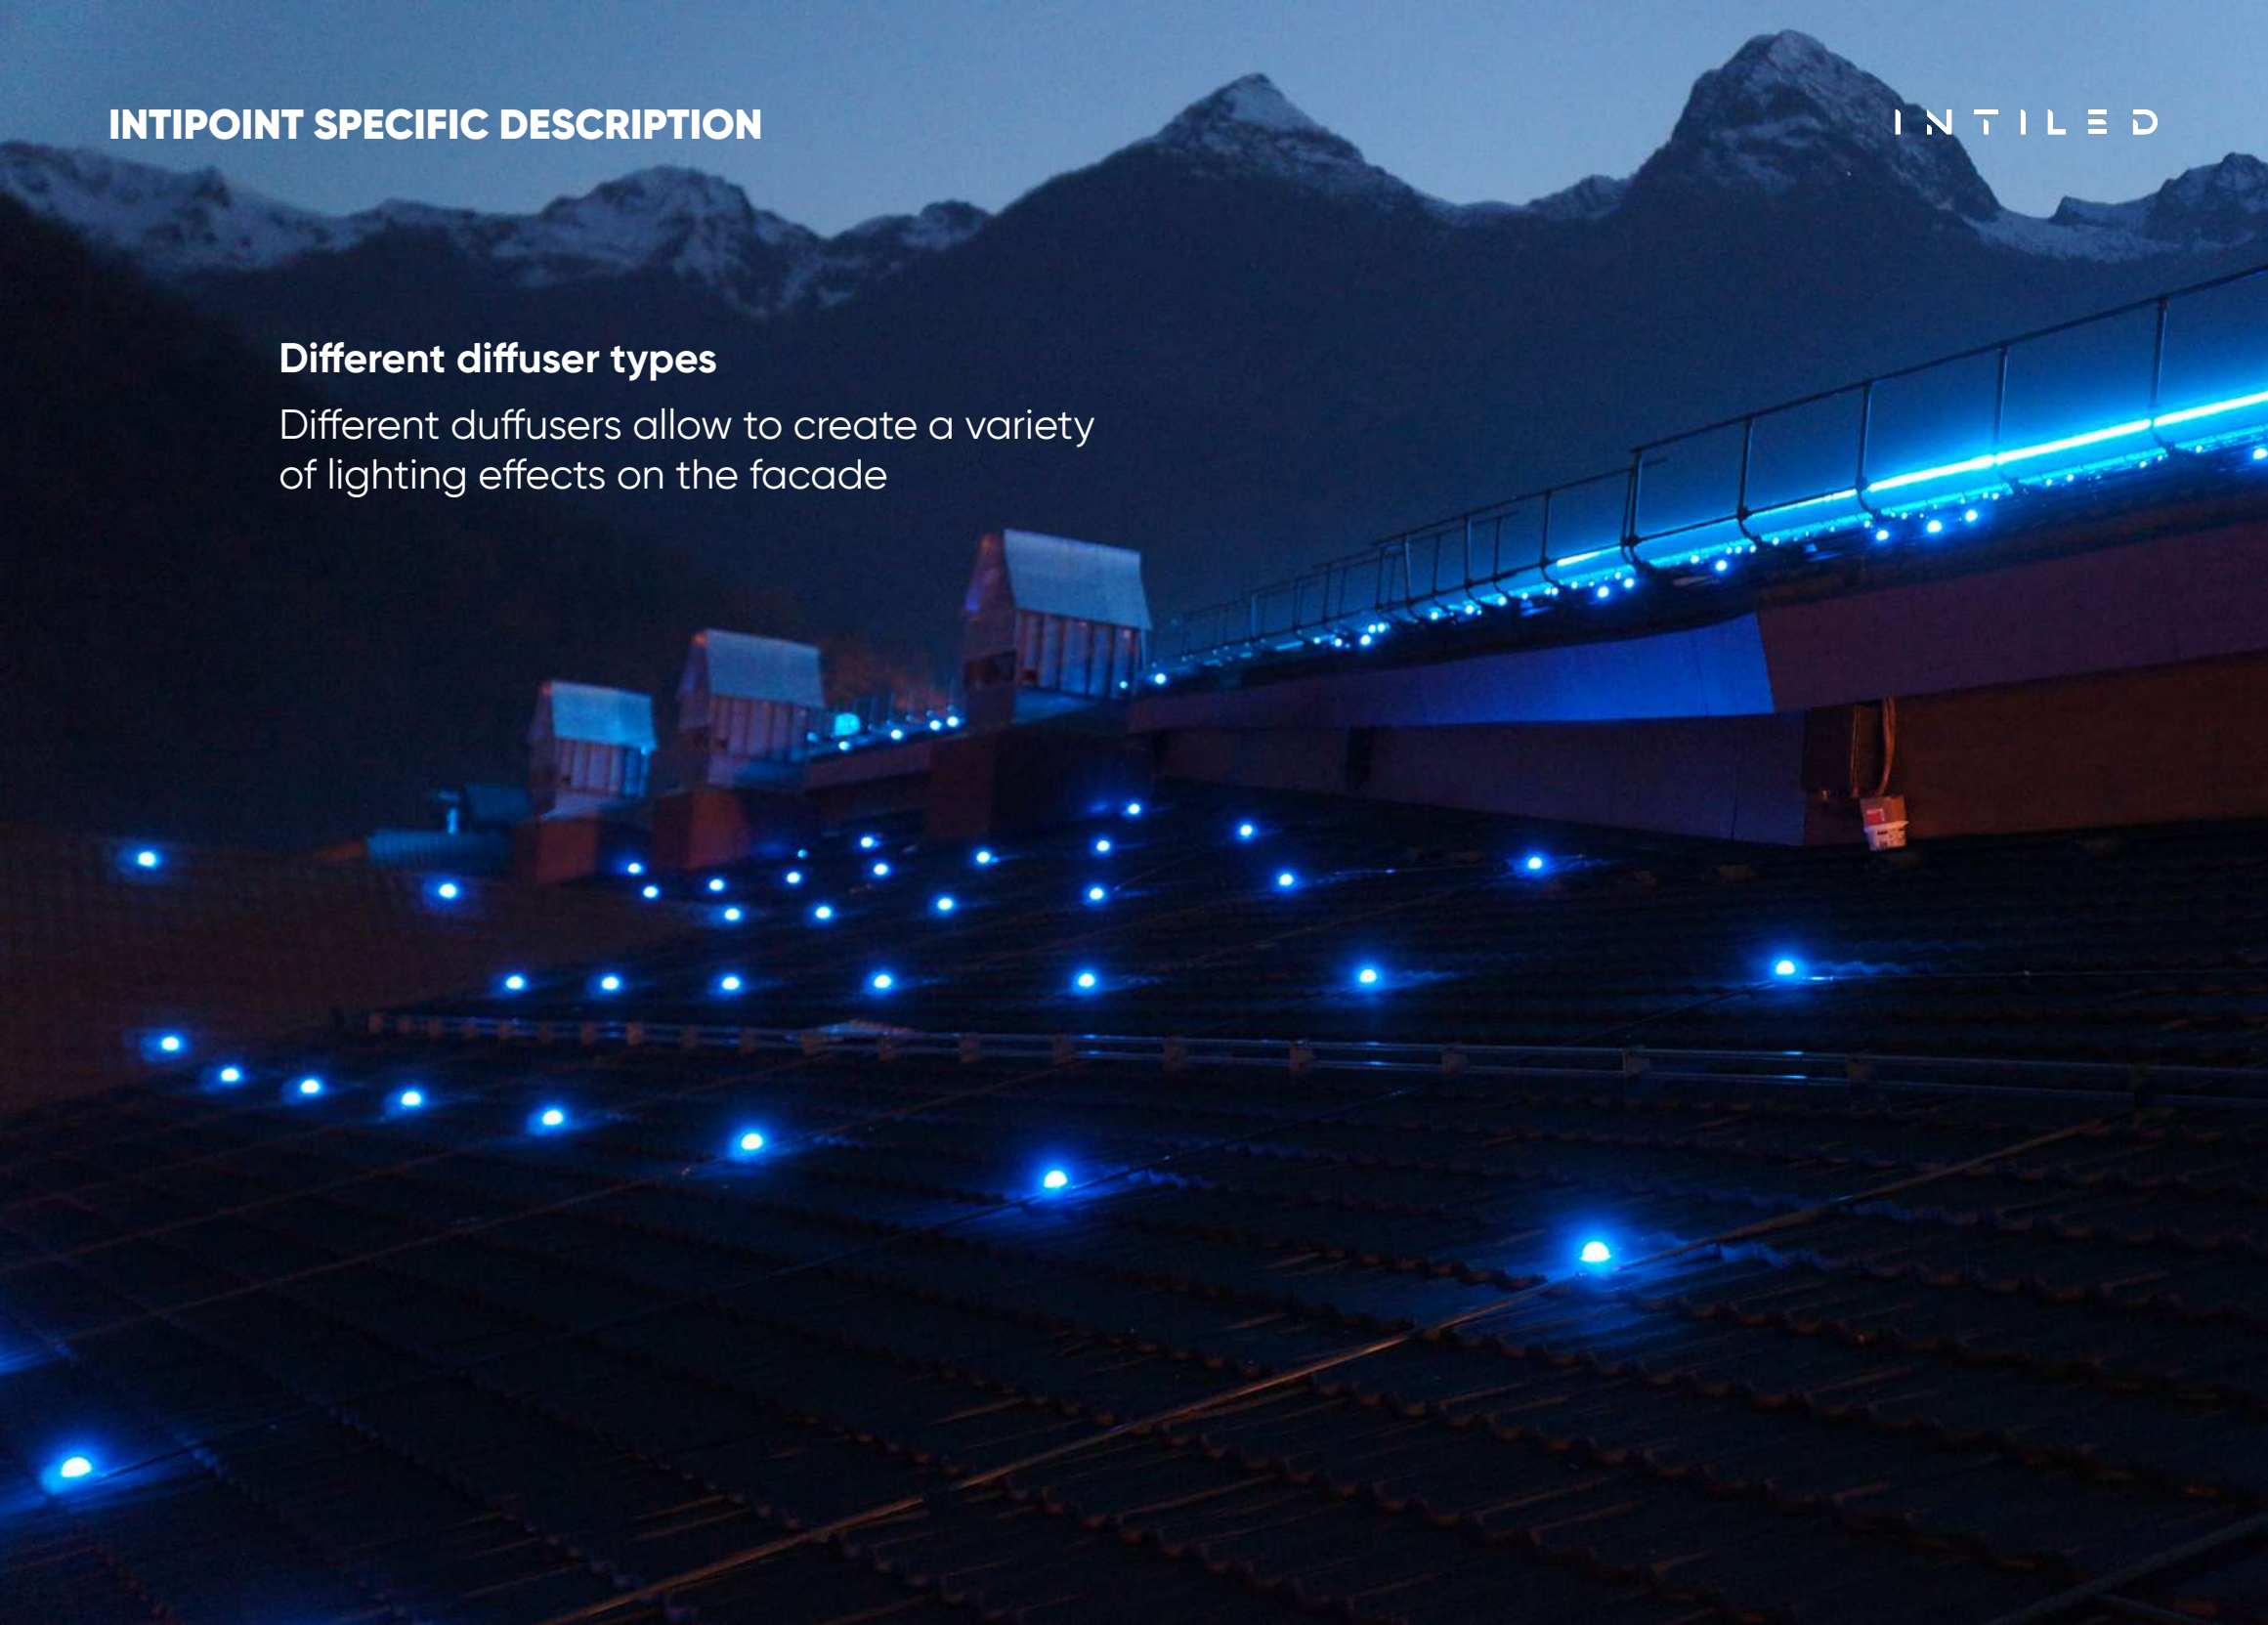


Light source	Cree (USA), Nichia (Japan) LEDs
Light color	white (3000 K, 4000 K, 5000 K), RGB
Optics	180°
Luminous flux	40 - 100 lm
Wattage	3, 4 W
Voltage	24 V DC
Protection class	IP67
Operating temperature	tropical edition: -40°C ... +55°C standard edition: -40°C ... +45°C
Lifespan	no less than 50 000 hours
Control	DMX-512
Dimensions	75x75x60 mm
Weight	0,3 kg
Mounting	surface mounting, recessed mounting
Customization	any non-standard combinations of LED colors in one fitting; power/control cables any length up to 10 m; diffuser types; cable exit options: side/bottom

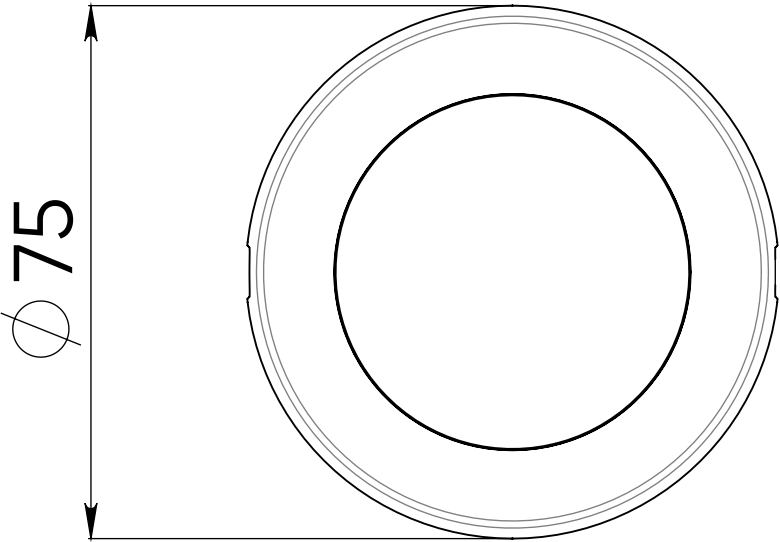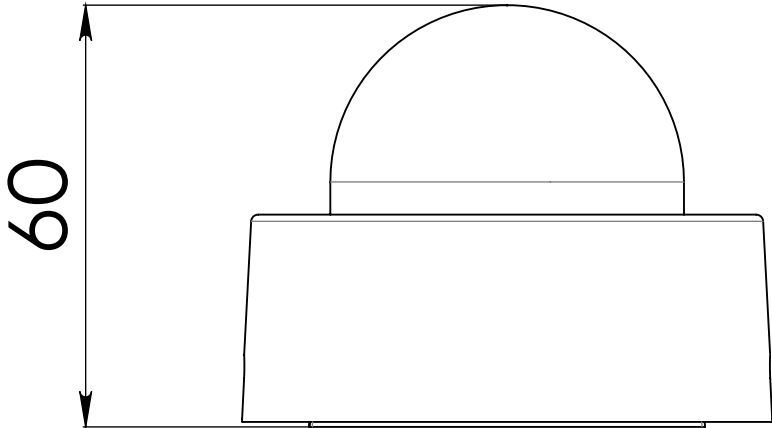

IntiPOINT CONNECTION DIAGRAM

I N T I L E D

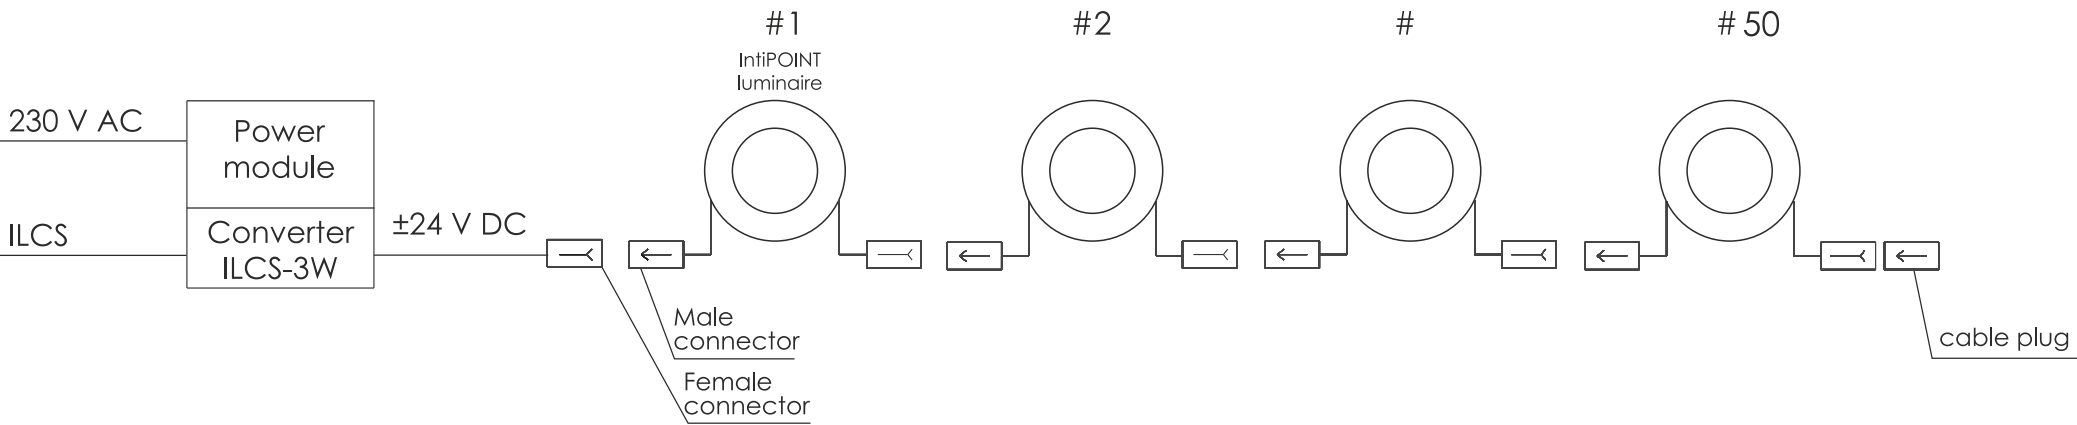

	Wire color	Input/Output
1	brown	+24 V
2	blue	DATA
3	yellow-green	-24 V

PORTFOLIO

Seliger City
Moscow


INTILED



PORTFOLIO

"Galaxy" Mountain Tourist Center
Krasnaya Polyana

INTILED

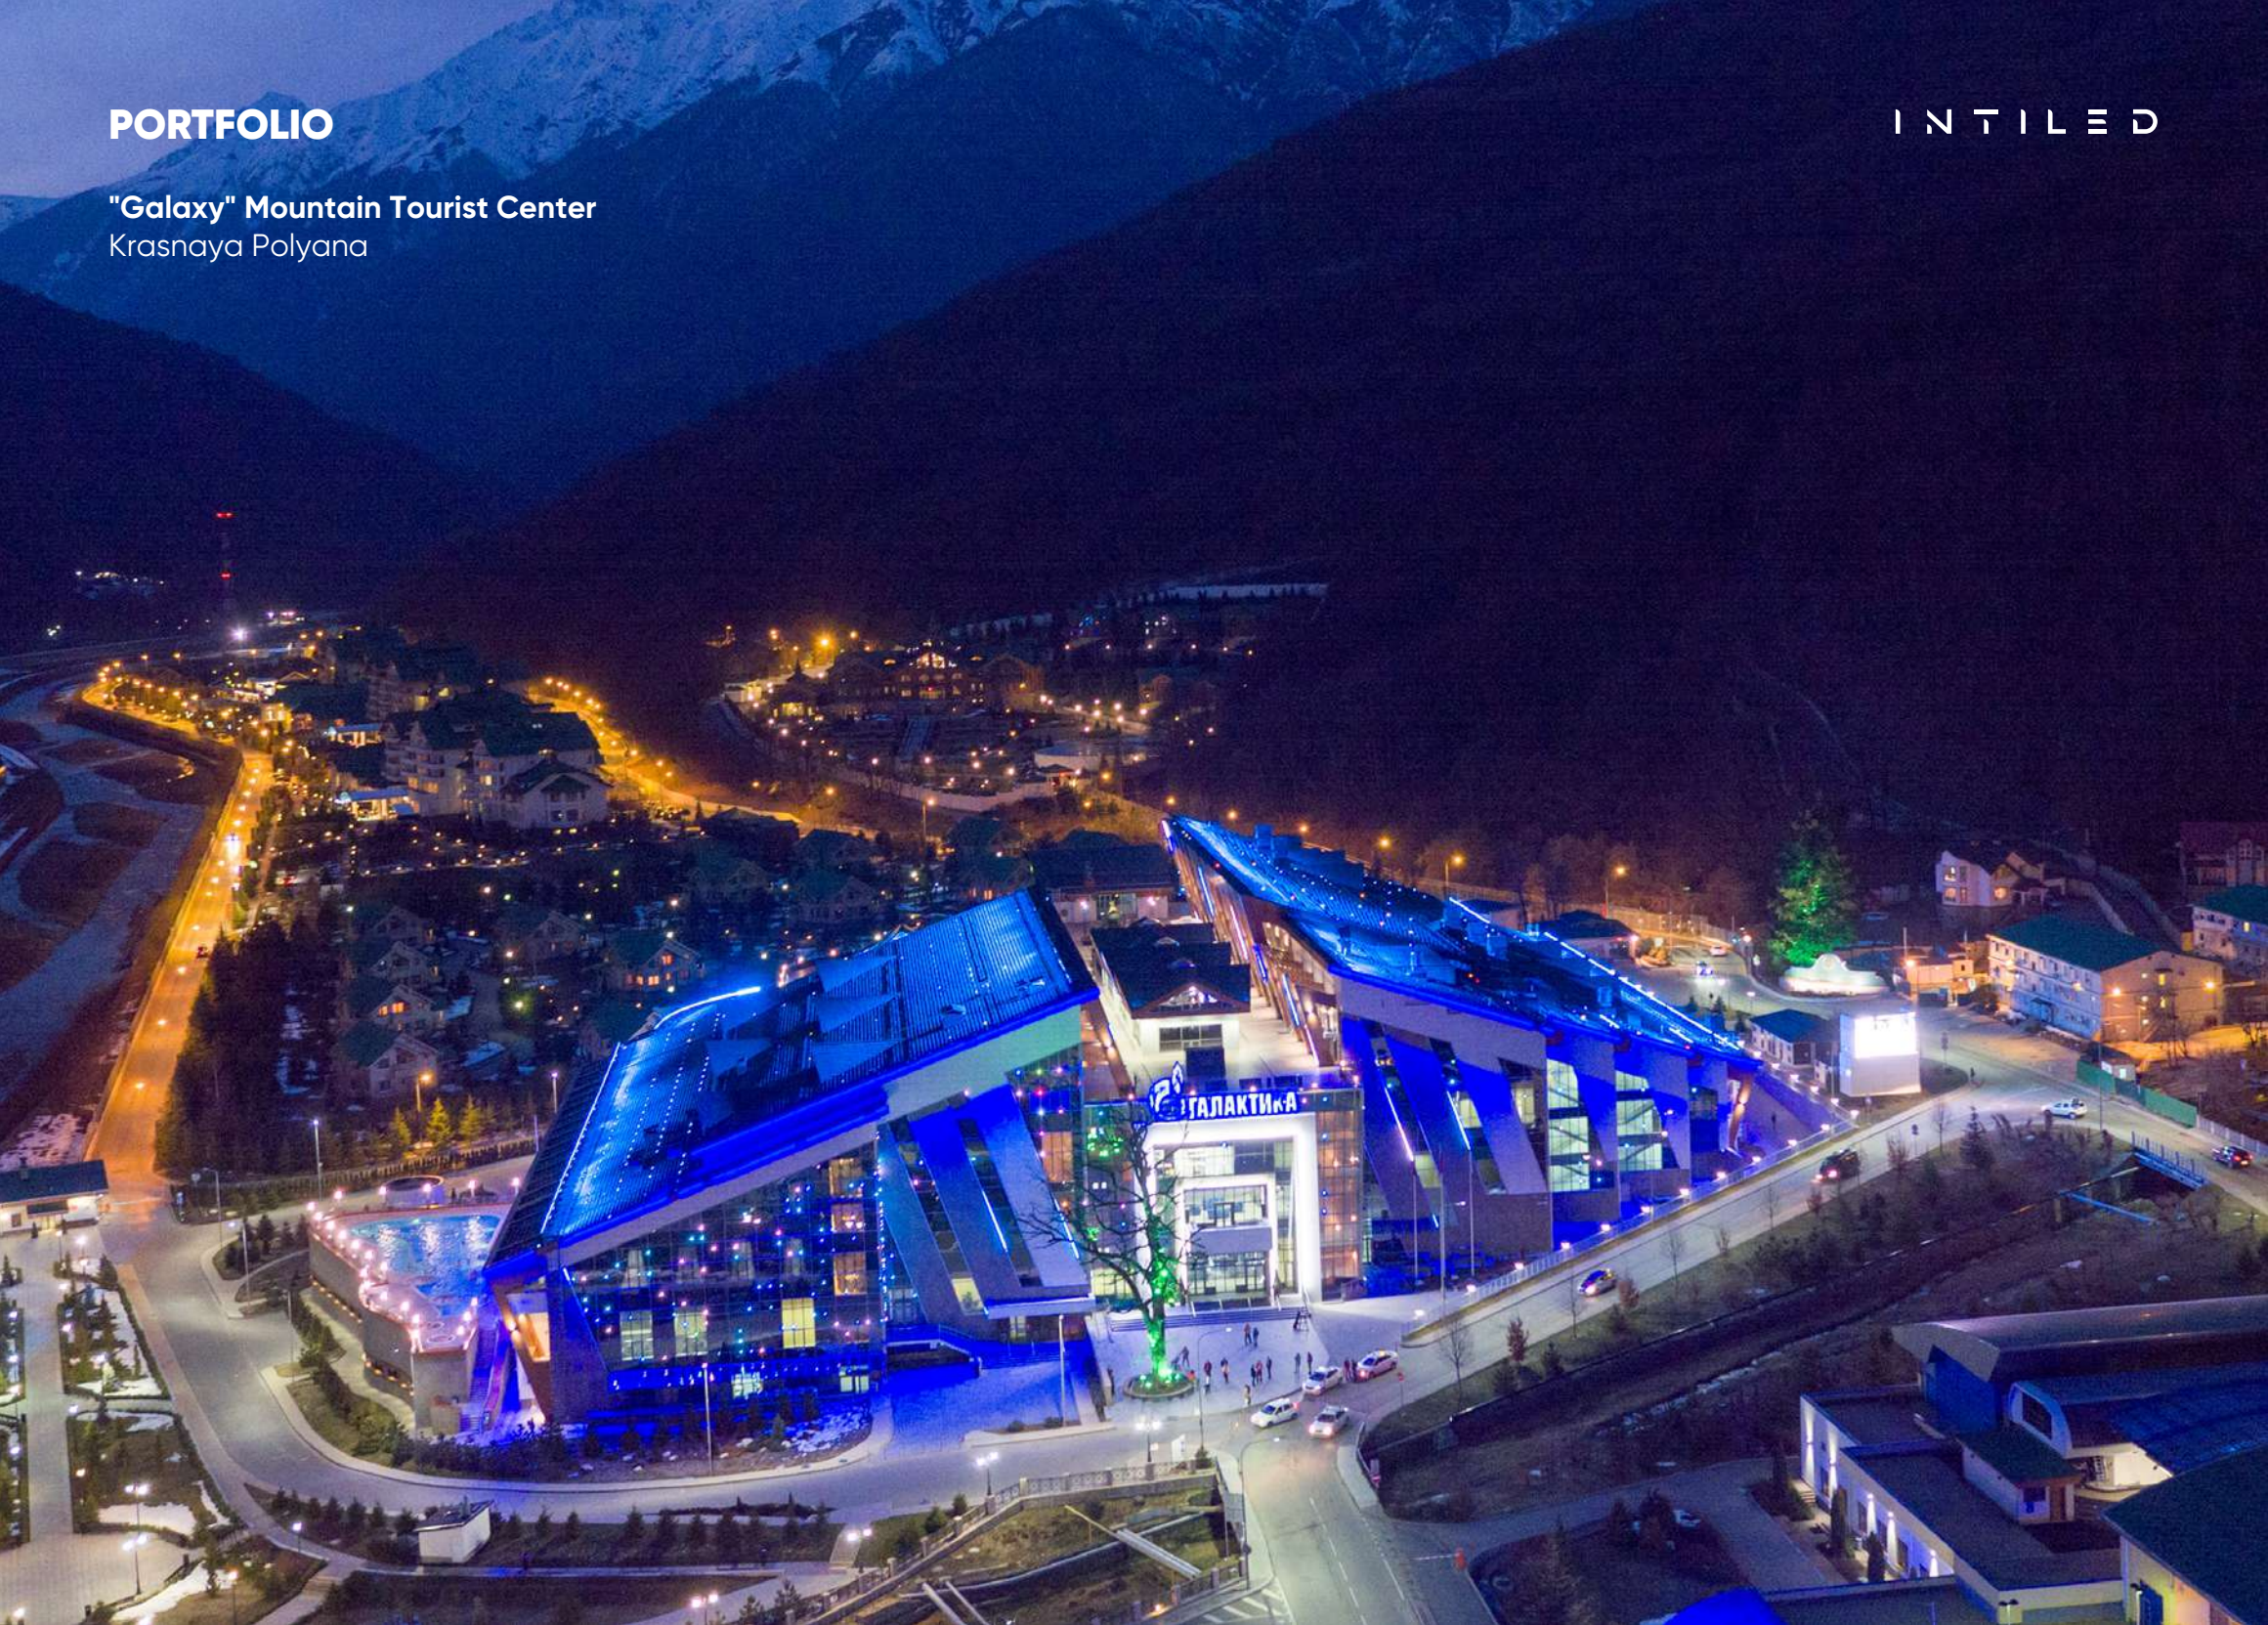



more information available
on the website