IntiLED

LACE

LACE-H IFF204-0,05W50-120DL24-100 (FW1)

5000K, frost resin,
white outer case, horizontal bendable
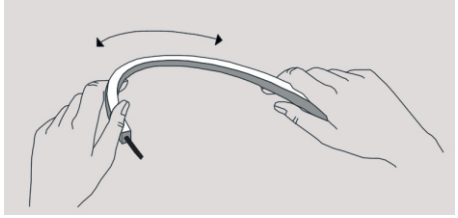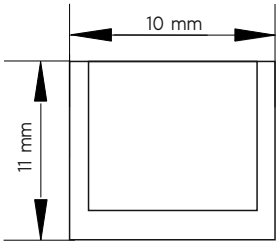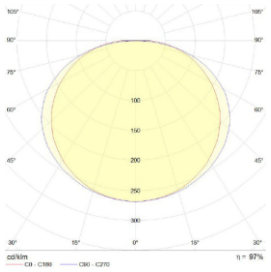
Application:	only horizontal bendable non-sectional strip
Light source:	SDS 3014 LEXTAR PC56H01 V4
Light color:	5000K
Optics:	120°
Power input:	11 Wt/m
Luminous flux:	490 lm/m
Voltage:	24 V DC
Control:	Dimm
Protection class:	IP65/68
Operation temperature:	-40°C ... +45°C
Lifespan:	no less than 50 000 hours
Warranty:	3/5 years
Max strip length:	6 m (need single end power cable) / 6 m (need double end power cable)
Cut internal strip :	29,45 mm
Materials:	PETERS® bi-components polyurethane resin UV treatment, PVC outer case, Kapton© LED boards, providing a high level of resistance to mechanical loads.
Mounting:	different mounting options available: sylicon clipses and outercases for the curved surfaces, aluminum profiles or steel clipses for the flat surfaces. The power cable exit can be from the end, side and back of the fixture depending on the project.
Attention:	do not cut! do not bend the profile with radius less than 80mm! no flex in the opposite direction!