# LINE

## ILF12-1,5R-85H-60(301)

**Application**
The linear LED luminaire LINE is designed to solve all the basic tasks of architectural lighting: creating floodlighting, accent, and even contour lighting effects.

| | |
|---|---|
| **Light source** | Cree (USA) |
| **Light color** | Red |
| **CRI** | ≥ 80 |
| **Luminous flux** | 520 lm |
| **Optics** | 85° |
| **Pulsation coefficient** | 5% |
| **Voltage** | AC 230 V, (50±1) Hz |
| **Power input** | 18 W |
| **Power factor Cos** | 0,9 |
| **Control** | No |
| **Electrical class** | I (first) |
| **Operating temperature:** | |
| **-for standard edition** | -40 °C...+45 °C |
| **-for tropic edition** | -40 °C...+55 °C |
| **Lifespan** | Not less than 50 000 hours |
| **Warranty** | 3-5 years |
| **Weight** | 1,8 kg |
| **Dimensions** | 600x58x56 mm |
| **Materials** | Housing: aluminum alloy covered with powder paint; silicate tempered glass |
| **Mounting** | On an adjustable brackets, the brackets can slide along the body of the luminaire for adjustable installation |
| **Accessories** | Shield, brackets |
| **Customization** | Housing and accessories painted in any RAL color; control/power cables of any length up to 3 m; brackets of customized length |

**IP66 IK08**

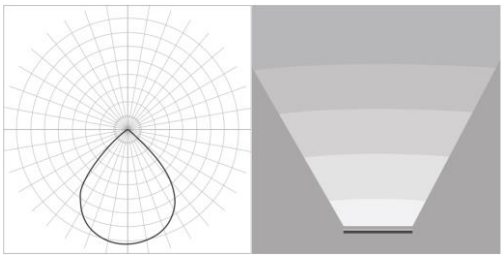

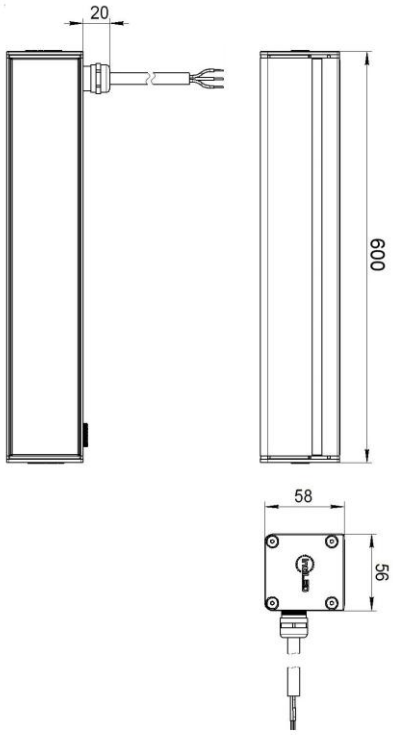


intiled.com

Inv.№17410-0