LINE

ILF24-1,5W50-35x105H-120(301)

Application
The linear LED luminaire LINE is designed to solve all the basic tasks of architectural lighting: creating floodlighting, accent, and even contour lighting effects.

Light source	Nichia (Japan)
Light color	White 5000 K
CRI	≥ 80
Luminous flux	2550 lm
Luminous Efficiency	57 lm/W
Optics	35x105°
Pulsation coefficient	5%
Voltage	AC 230 V, (50±1) Hz
Power input	44,5 W
Power factor Cos	0,95
Control	No
Electrical class	I (first)
Operating temperature:	
-for standard edition	-40 °C...+45 °C
-for tropic edition	-40 °C...+55 °C
Lifespan	Not less than 50 000 hours
Warranty	3-5 years
Weight	3,2 kg
Dimensions	1200x56x58 mm
Materials	Housing: aluminum alloy covered with powder paint; silicate tempered glass
Mounting	On an adjustable brackets, the brackets can slide along the body of the luminaire for adjustable installation
Accessories	Shield, brackets
Customization	Housing and accessories painted in any RAL color; control/power cables of any length up to 3 m; brackets of customized length

IP66 IK08

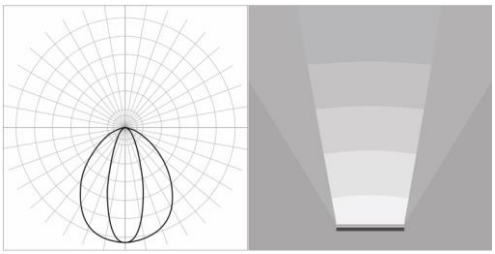

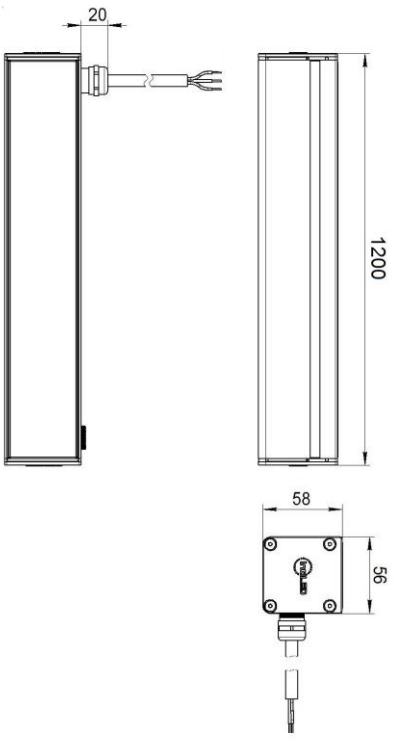

intiled.com

Inv.№17405-0