## **PILL**

## IRF1-3B-65L24

## **Application**

Ultra-compact accent lighting fixture, intended for lighting of tiny facade details or precise landscape lighting.

Light color Blue CRI -

Delivered lumen output 43 lm

Luminous Efficiency 14 lm/W

Optics 65°

Voltage 24 V DC

Power input 3 W

Control No

Electrical class III (third)

Operating temperature  $-40 \,^{\circ}\text{C...} + 55 \,^{\circ}\text{C}$ 

**Lifespan** not less than 50 000 hours

 Warranty
 5 years

 Weight
 0,3 kg

**Dimensions** 48x48x66 mm

Materials housing, bracket – die-cast

aluminum; diffusor – polycarbonate

Mounting on an adjustable bracket


**Accessories** shield

**Customization** housing and accessories painted in

any RAL color; IP68 connectors; power cables of any length up to 3

m



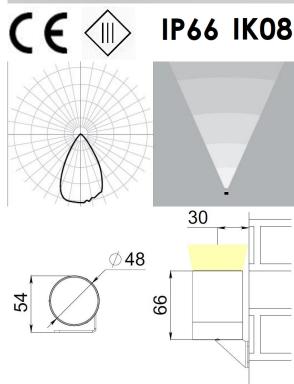

## I N T I L E D