



SLIM fullcolor NEW


An ultra-compact linear luminaire that delivers excellent light quality thanks to the special combination of its optics and multi-chip LED.

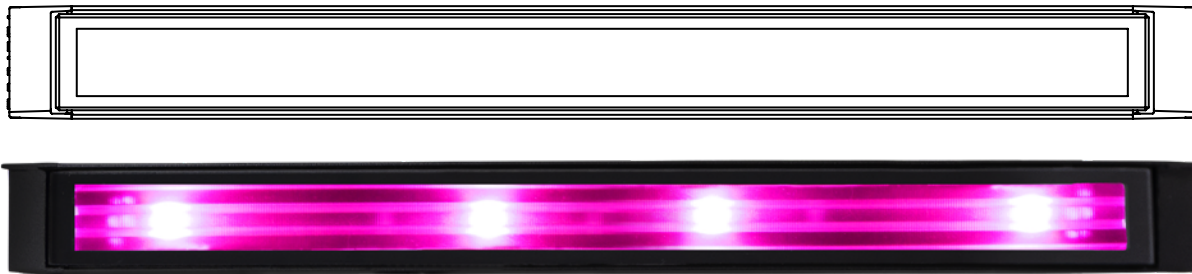


Application



floodlight



accent



contour

SLIM fullcolor



fullcolor
(multichip RGBW40)



40x100° 50x90° 60x90° 120°

CRI

≥80 (for white color)

Color binning

2 MacAdam ellipses for white,
±3 nm for color LED

Voltage


48 V DC

IP66



Lifespan

not less than 50 000 hours



- 40°C + 55°C

Controls, protocols

DMX-512

Controls, pixel size

1 luminaire – 1 pixel

Materials

housing – extruded aluminum

end caps – cast aluminum

protective glass – silicate tempered glass

Standard RAL colors



1015 1001 8004 8017



9005 7016 9006 9003

Standard coating type

moire

Accessories

brackets

screens

shields

Customization

product length, wattage and luminous flux

customized for a specific project


Available custom versions




Technologies



Length, L

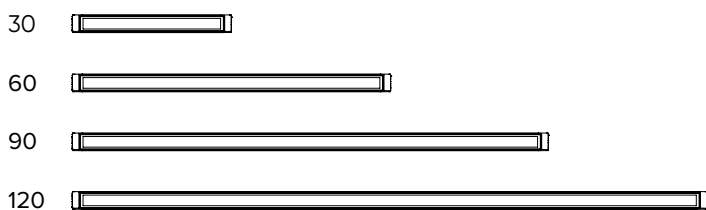

L, cm	weight, kg
30	0,5
60	0,9
90	1,3
120	1,7

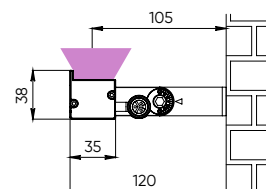

SLIM fullcolor



1. Select a model

Serial code	W, max	Im, max	Length, cm
ILF3-0,6	6	190	30
ILF6-0,6	10	390	60
ILF9-0,6	14	600	90
ILF12-0,6	18	750	120

2. Create an article number

Serial code	Color	Optics	Controls*	Supply voltage**	Length, cm
ILF3-0,6	FC	40x100 50a90 60x90 120	C	L48	30
ILF6-0,6					60
ILF9-0,6					90
ILF12-0,6					120

* C – protocol DMX-512

**L48 – supply voltage 48 V DC

3. Select accessories

Type	Article number	Distance from the façade to the luminaire center, mm
bracket kit	SLIM-01-50	100
	SLIM-01-100	150

Type	Article number	Height, mm	Length, mm
shields	PP SLIM-01-020-30	10	300
	PP SLIM-01-020-60		600
	PP SLIM-01-020-90		900
	PP SLIM-01-020-120		1200

Type	Article number	Height, mm	Length, mm
screen	SLIM-05-030-30	30	300
	SLIM-05-030-60		600
	SLIM-05-030-90		900
	SLIM-05-030-120		1200