SLIM

ILF12-0,3W50-120DL48-30(10P02)

Application

The linear LED luminaire LINE is designed to solve all the basic tasks of architectural lighting: creating floodlighting, accent, and even contour lighting effects.

Light source	Nichia (Japan)
Light color	White 5000 K
CRI	≥ 80
Binning	2 MacAdam steps
Luminous flux	255 lm
Optics	120°
Voltage	DC 48 V
Power input	3,4 W
Control	PWM
Electrical class	III (third)
Operating temperature: **-for standard edition** **-for tropic edition**	 -40 °C...+45 °C -40 °C...+55 °C
Lifespan	not less than 50 000 hours
Warranty	5 years
Weight	0,5 kg
Dimensions	300x35x37,5 mm
Materials	Housing: aluminum alloy covered with powder paint; silicate tempered glass
Mounting	On an adjustable brackets
Accessories	Brackets
Customization	Housing and accessories painted in any RAL color; control/power cables of any length up to 3 m; brackets of customized length
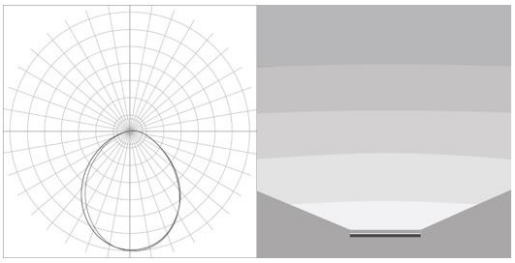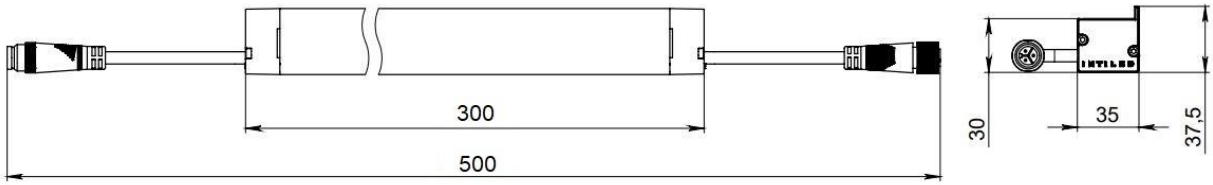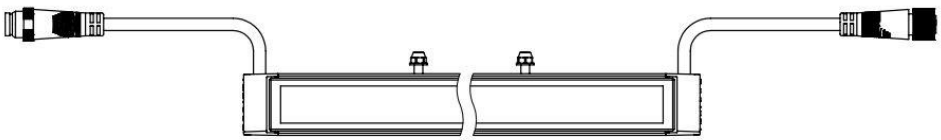
IP66 IK08