SLIM

ILF38-0,3A-60x90DL48-90(10P02)

Application

The linear LED luminaire LINE is designed to solve all the basic tasks of architectural lighting: creating floodlighting, accent, and even contour lighting effects.

Light source	Nichia (Japan)
Light color	Amber
CRI	-
Binning	2 MacAdam steps
Luminous flux	790 lm
Optics	60x90°
Voltage	DC 48 V
Power input	11 W
Control	PWM
Electrical class	III (third)
Operating temperature: **-for standard edition** **-for tropic edition**	 -40 °C...+45 °C -40 °C...+55 °C
Lifespan	not less than 50 000 hours
Warranty	5 years
Weight	1,3 kg
Dimensions	900x35x37,5 mm
Materials	Housing: aluminum alloy covered with powder paint; silicate tempered glass
Mounting	On an adjustable brackets
Accessories	Brackets
Customization	Housing and accessories painted in any RAL color; control/power cables of any length up to 3 m; brackets of customized length
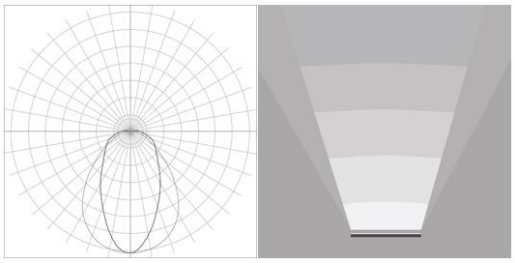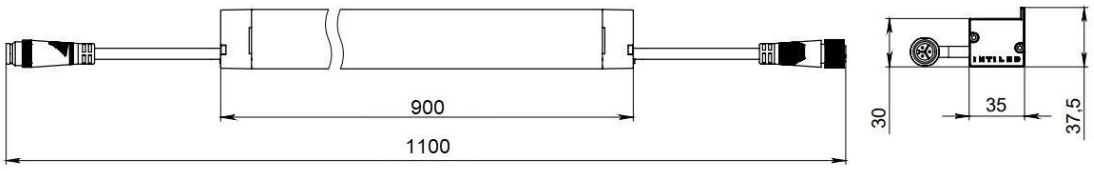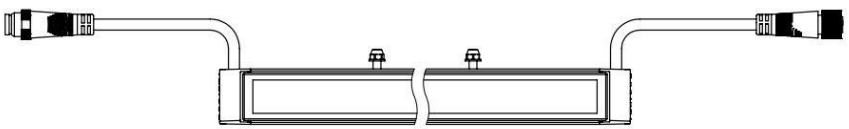
CE III **IP66 IK08**