



# SPOT NEW

An updated version of the IntiSPOT accent luminaire.  
In addition to a fresh body design, the new SPOT  
contains all the latest INTILED technologies.

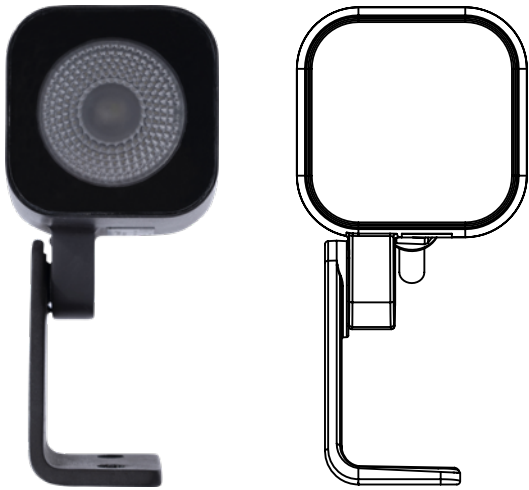

## Application



accent

# SPOT

NEW



3000K



4000K



5000K



15°



15x60°



30°



40°



120°

## CRI

≥80 (for white color)

## Color binning

2 MacAdam ellipses for white,  
±3 nm for color LED

## Voltage


24 V DC

IP66



## Lifespan

not less than 50 000 hours



- 40°C + 55°C

## Controls, protocols

PWM

## Controls, pixel size

1 luminaire – 1 pixel

## Materials

housing, bracket – aluminum alloy

diffusor – tempered glass

top glass – monolithic polycarbonate

## Standard RAL colors



1015



1001



8004



8017



9005



7016



9006



9003

## Standard coating type

moire

## Accessories

screen

tube

## Customization

control: PWM, DMX-512, DMX-512 + RDM

connectors IP68

cable length up to 5m

light color, wattage and luminous flux


customized for a specific project

## Available custom versions



100%

## Technologies

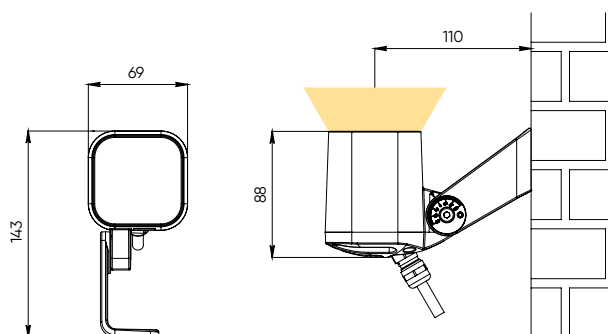

weight, kg  
0,6

## 1. Select a model

Serial code	W, max	lm, max
IMF1-4	4,5	330

## 2. Create an article number

Serial code	Color	Optics	Controls*	Supply voltage**
IMF1-4	W30 W40 W50	15 15x60 30 40 120	D	L24

\* D – protocol PWM

\*\*L24 – supply voltage 24 V DC

## 3. Select accessories

Type*	Article number	Height, mm
screen	SPOT-02-050	50
tube	SPOT-03-050	50

\* screen – for grazing floodlighting

tube – for lighting of spatial structures