


SPOT
fullcolor


INTILED




SPOT fullcolor is the new version of IntiSPOT accent luminaire. Now - 16 millions of clear and bright colors in the new super-compact body.




SPOT











KUB

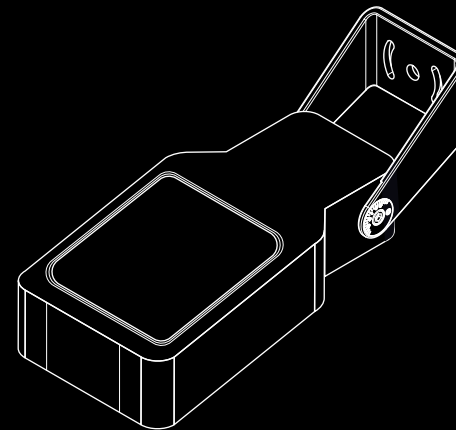

RAY

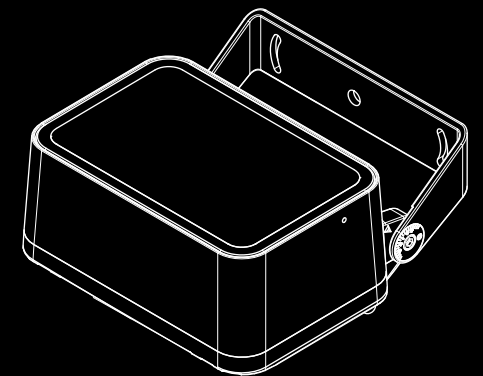

BOX

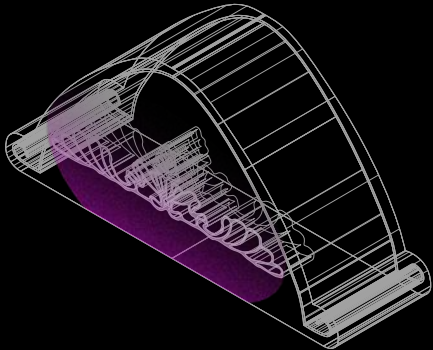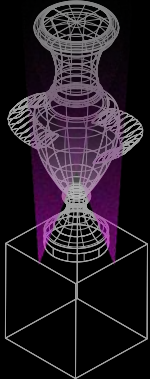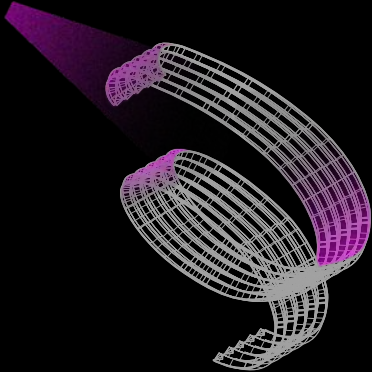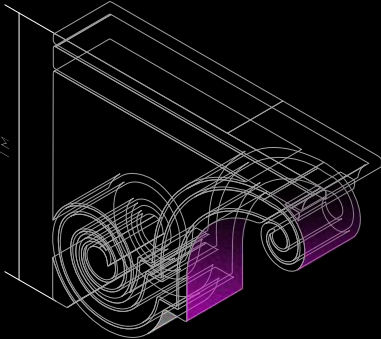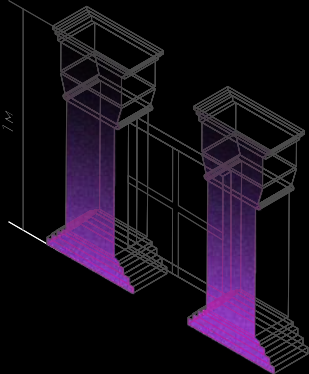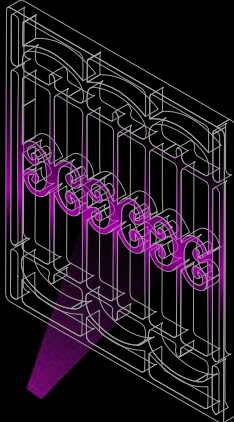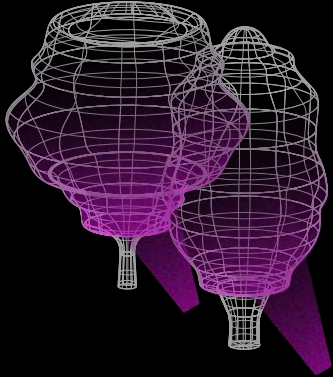	Architectural lighting	Landscape lighting
Accent lighting	<p>mascaron 40°, 120°</p>  <p>vase 15x60°, 120°</p> 	<p>small plants 15°, 30°, 40°</p>  <p>small architectural form 30°, 40°</p> 
Flood lighting	<p>console 30°, 40°, 120°</p>  <p>pilasters 15°, 30°</p> 	<p>trellis 15°, 15x60°</p>  <p>small bushes 40°, 120°</p> 

SPOT fullcolor TECHNICAL SPECIFICATION

I N T I L E D

Light color	fullcolor
Lumen output	up to 310 lm
Control	DMX-512 + RDM
Напряжение питания	230 V AC
Optics	15°, 30°, 40°, 120°, 15x60°
Protection class	IP66
Mechanical resistance	IK08
Operating temperature	-40°C ... +55°C
Lifespan	not less than 50 000 hours
Dimensions	97x70x90 mm – without bracket 143x69x110 mm – with bracket
Weight	0,6 kg
Materials	housing, bracket – die cast aluminum; diffusor – tempered glass
Contents of delivery	luminaire, passport, package

SPOT fullcolor MODEL RANGE

I N T I L E D

15°



30°



40°



15x60°



120°



SPOT fullcolor MODEL RANGE. ILLUMINANCE

I N T I L E D


15°

30°

40°

15x60°

120°

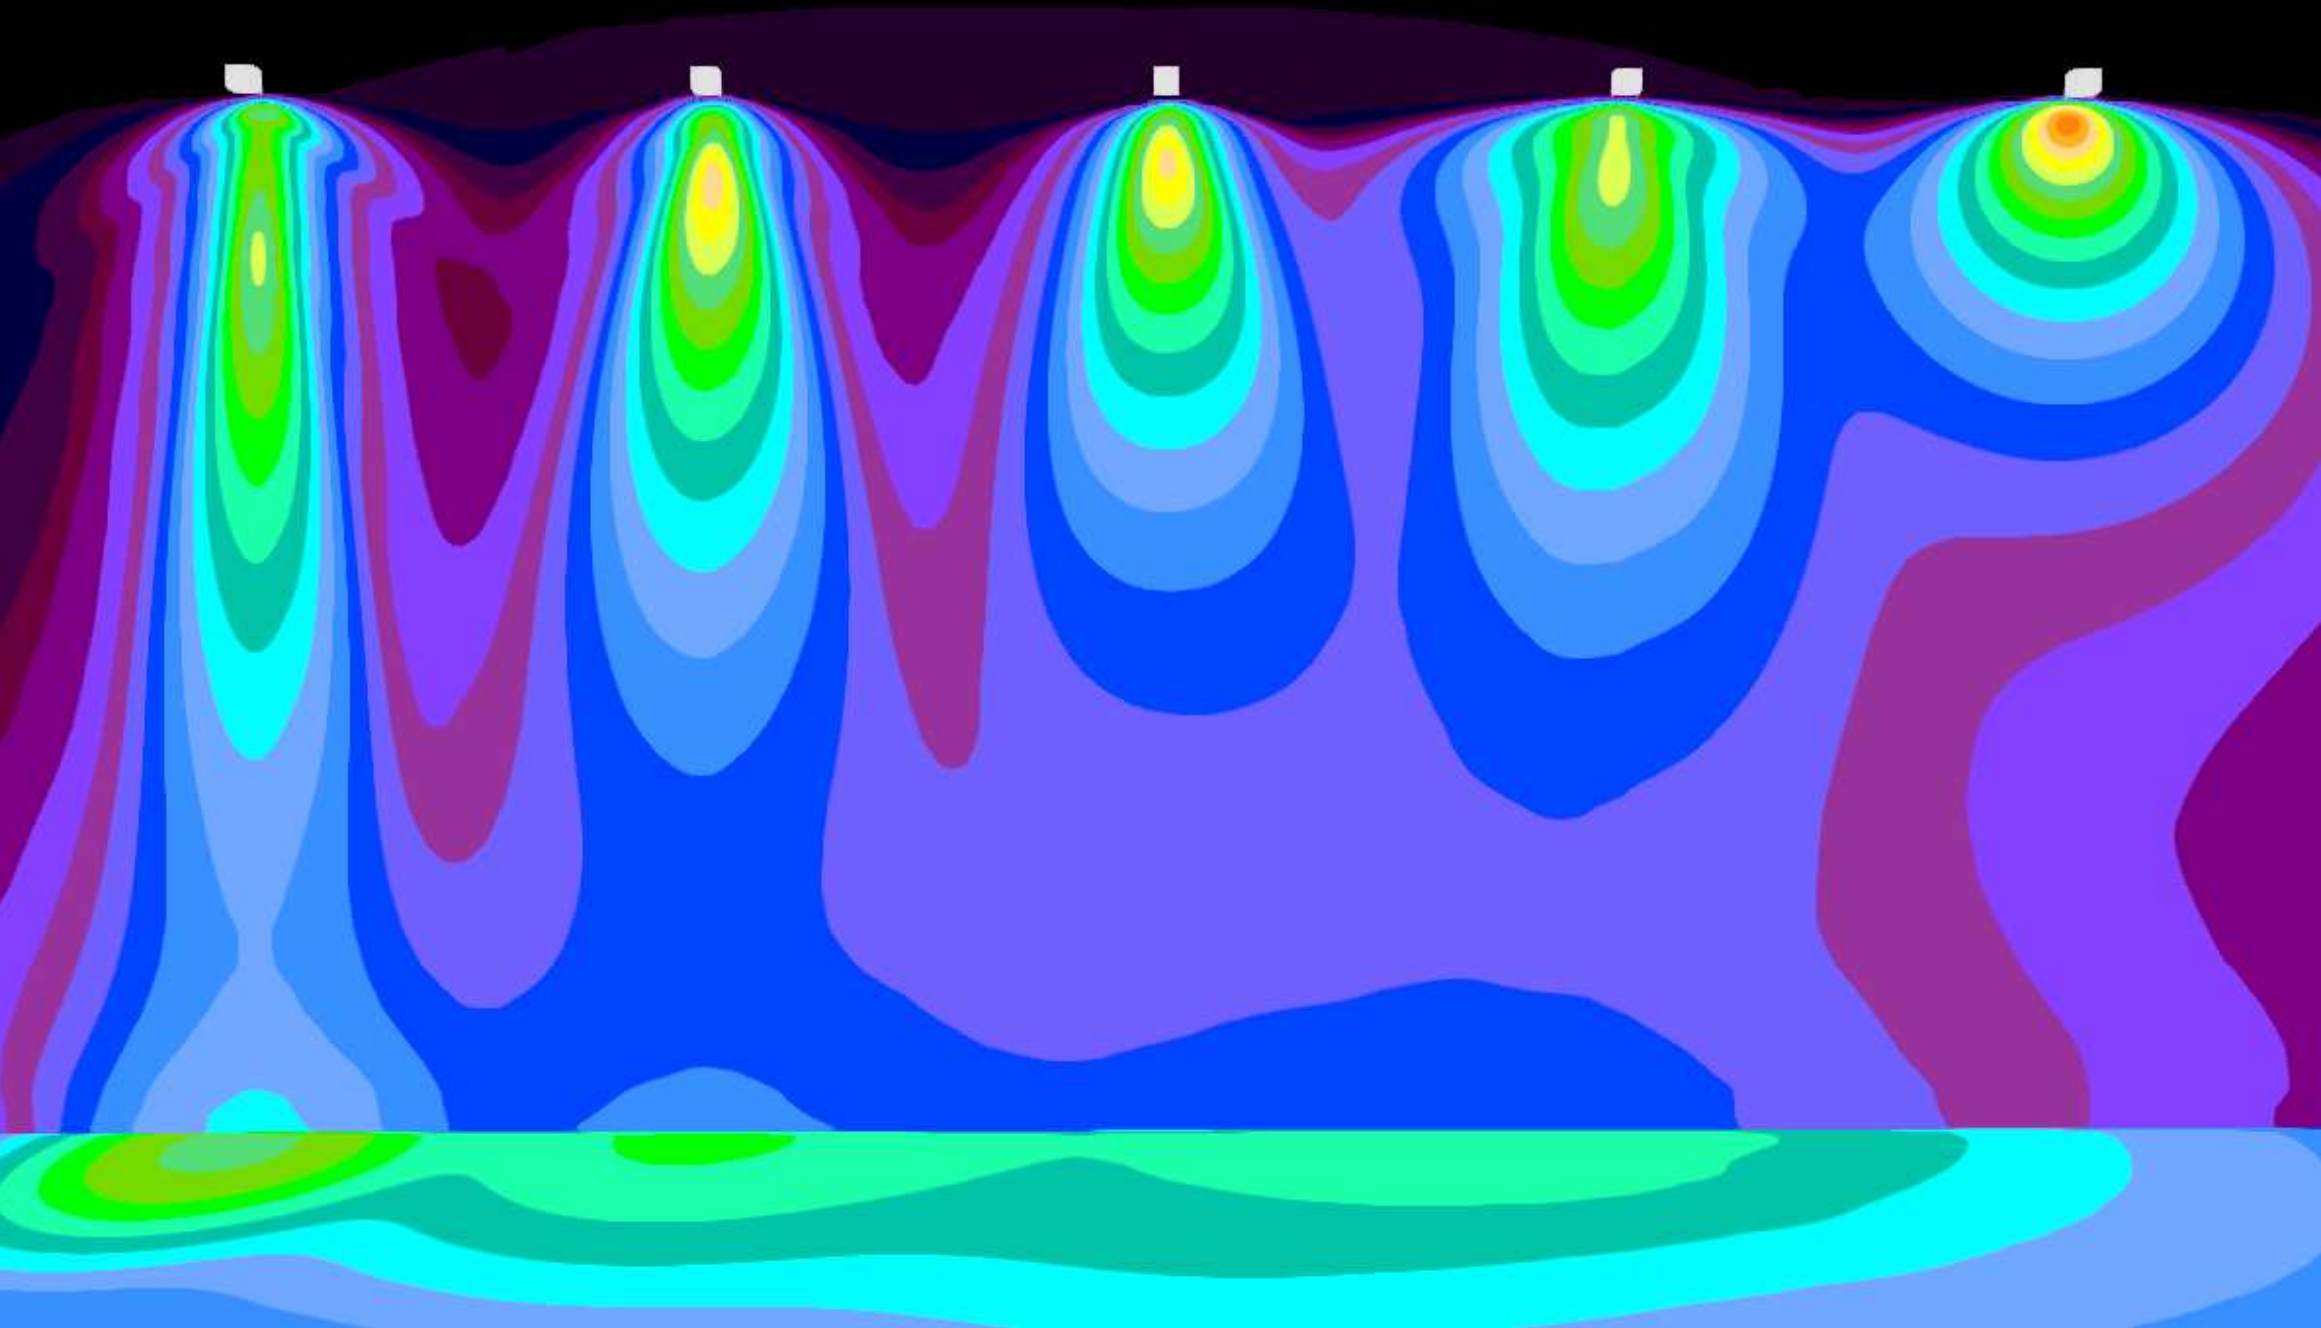

SPOT fullcolor MODEL RANGE. LUMINANCE

I N T I L E D


15°

30°

40°

15x60°

120°

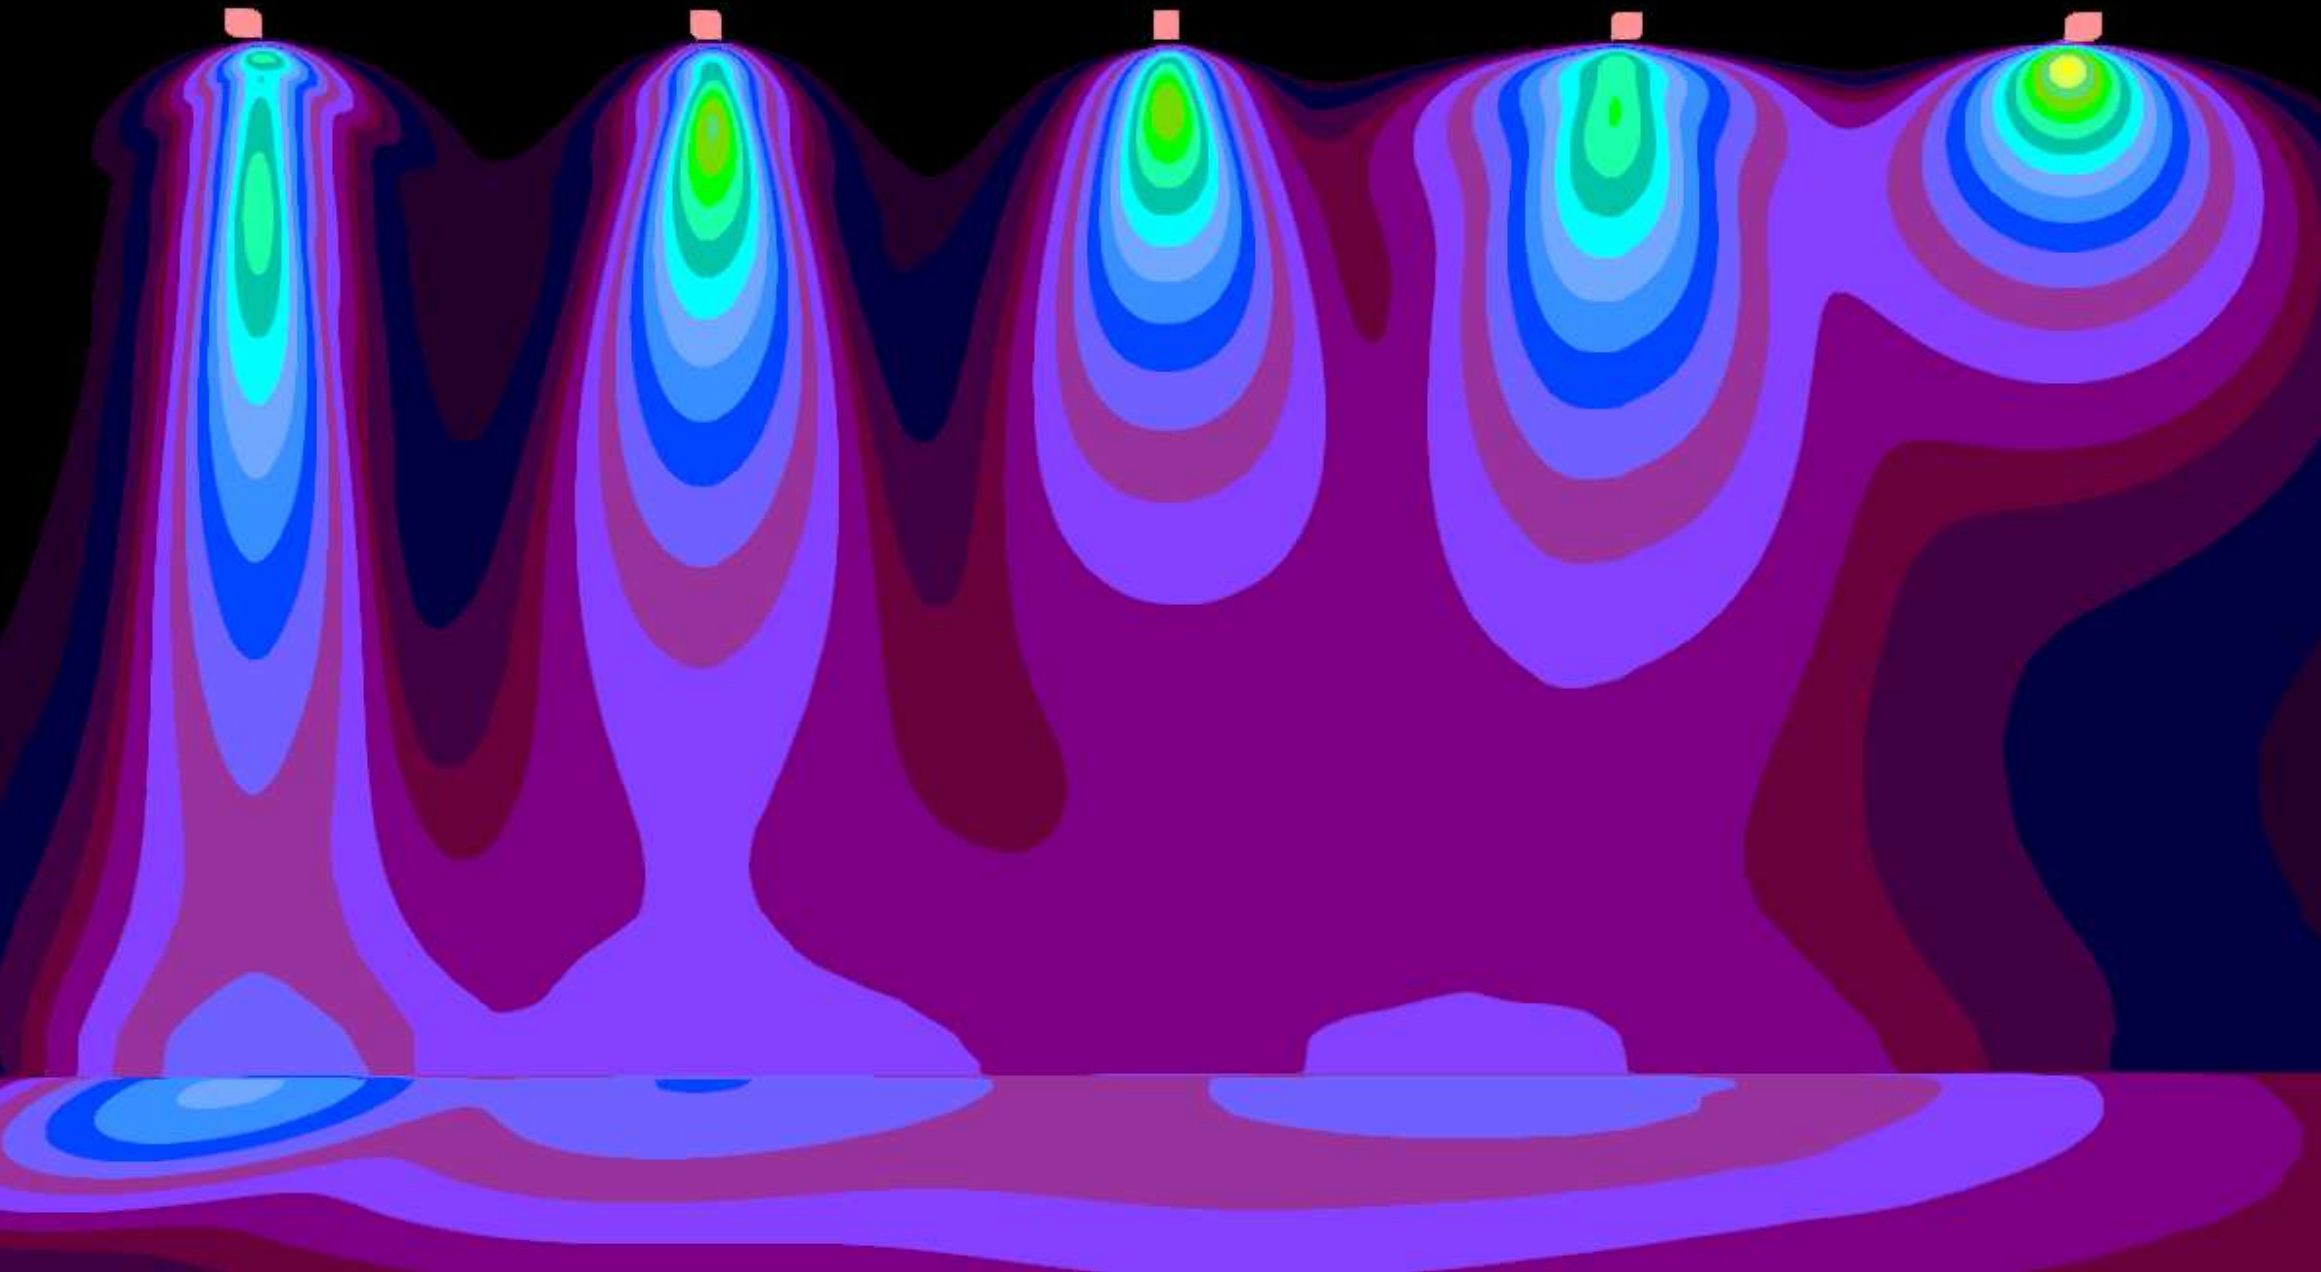

COMPARISON BETWEEN DIFFERENT SERIES OF PRODUCTS

I N T I L E D

SPOT
30°



IntiSPOT
24°



KUB
30°



RAY
30°



COMPARISON BETWEEN DIFFERENT SERIES OF PRODUCTS. ILLUMINANCE


I N T I L E D



SPOT
30°

IntiSPOT
24°

KUB
30°


RAY
30°

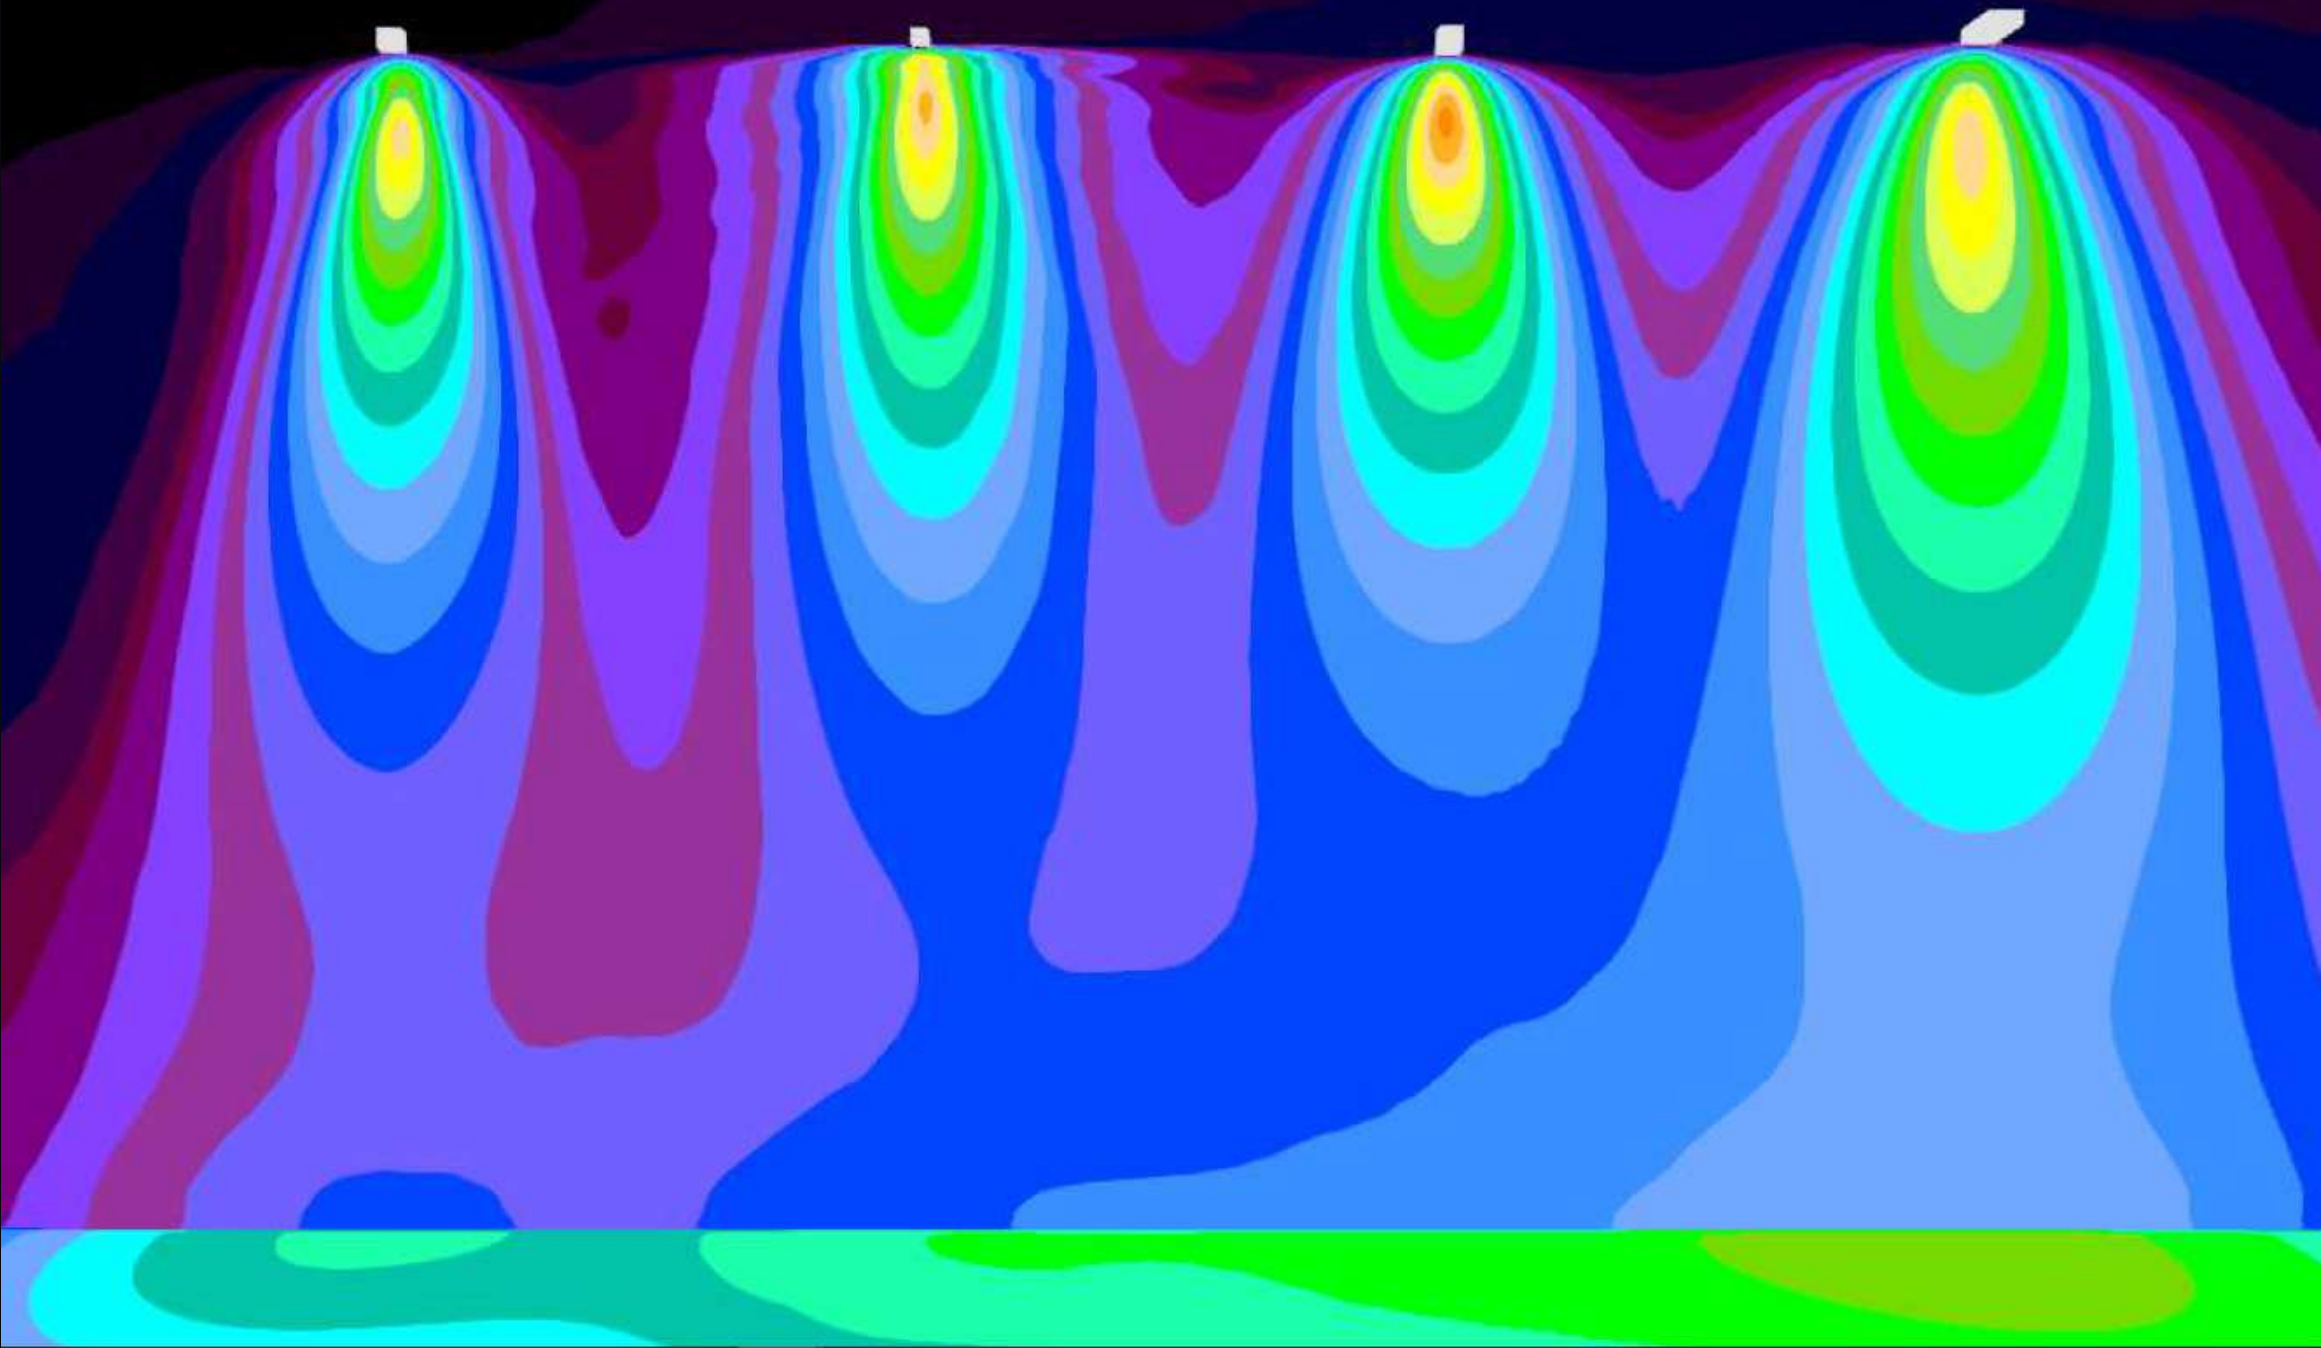

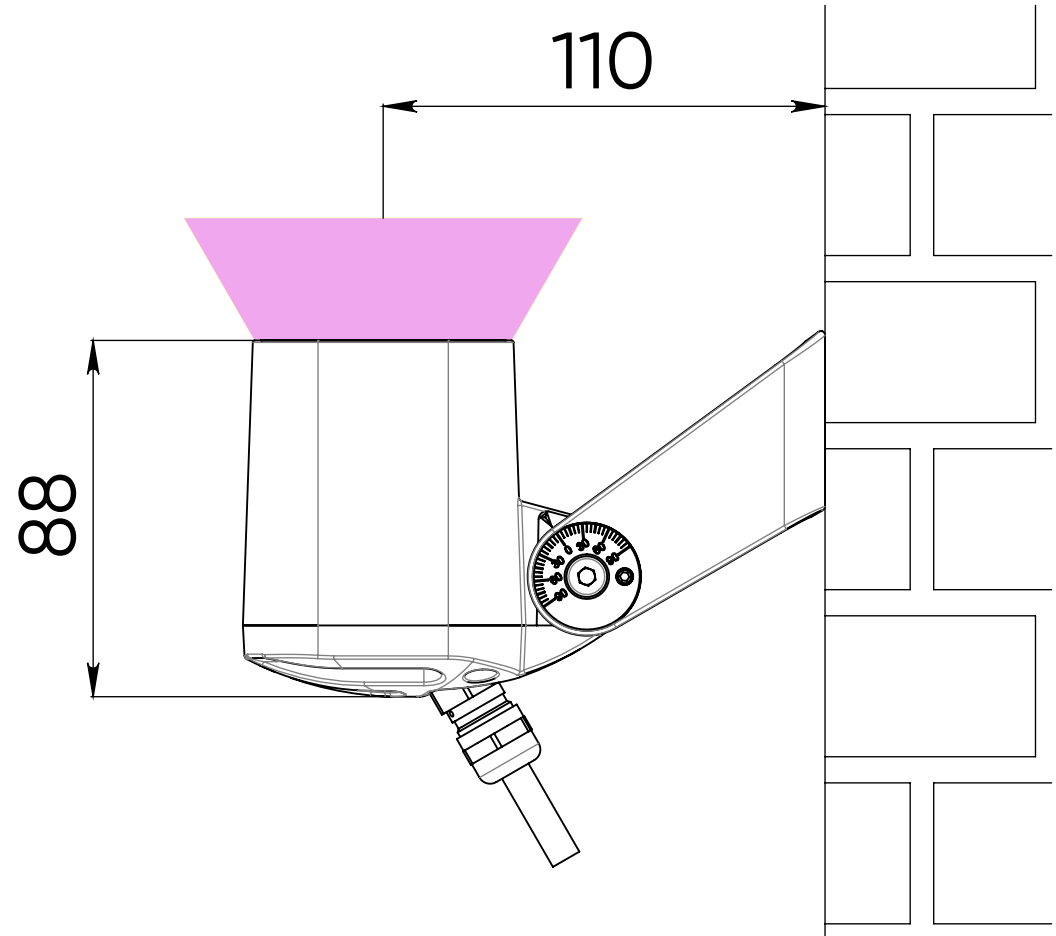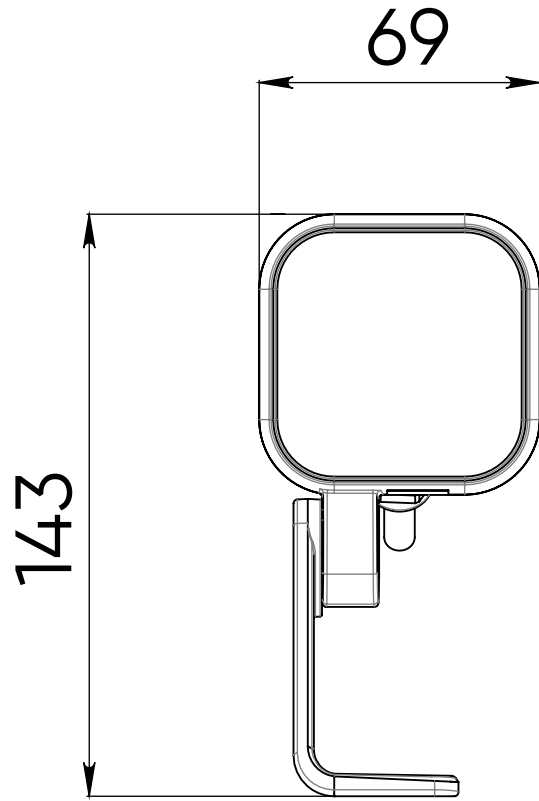

SPOT fullcolor CONNECTIONS DIAGRAM

I N T I L E D

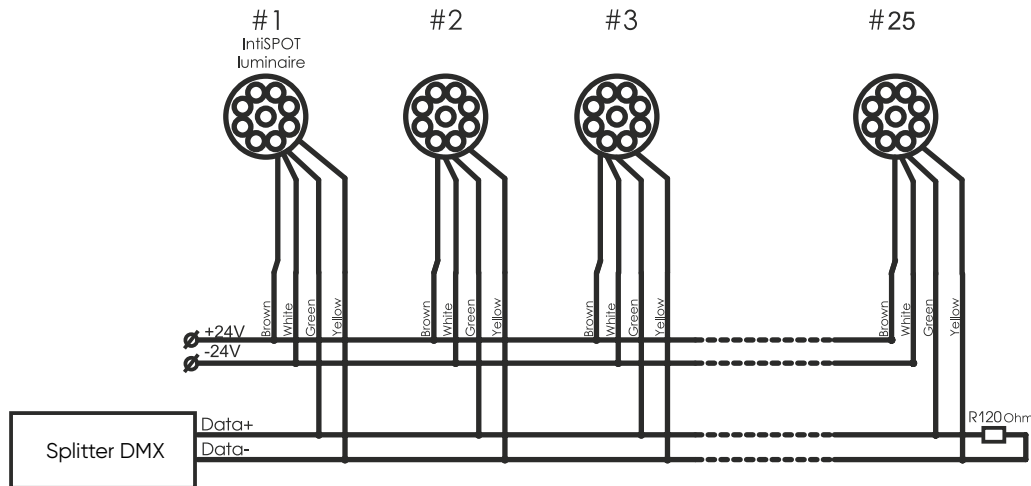

Wire color	Input/Output
brown	+ 24 V
white	- 24 V
green	Data+
yellow	Data-

more info

