

KUB fc  
INTILED



KUB fullcolor offers more than 16 million bright, pure colors in the familiar ultra-compact and concise KUB device body



Maximum variety of lighting effects and broad control possibilities together with toy-sized housing with power supply onboard makes KUB an easy and comfortable device to work with at any project stage: from concept and light modelling to mounting and servicing lighting system on-site



The compact dimensions make it possible to place KUB fullcolor on columns, visors, in narrow inter-window spaces, on decorative details



The perfect combination of optics and multi-chip diodes enables any architectural lighting task. No light burn, no edge effects, no artefacts for luminaires with any optics



I N T I L E D

Color mixing takes place inside the device,  
creating a fundamentally new quality of light  
in any shade, including pure white of any color  
temperature, from warm to cold



A unique adjustment system allows you to quickly mount and adjust the luminaire using a regular hexagon screwdriver



Advanced feedback control  
via DMX+RDM protocol





**Accessories**

- housing and accessories painting in any RAL color
- IP68 connectors
- cable lengths up to 3 meters
- shield





## ОСНОВНЫЕ ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

I N T I L E D

Light source	Osram (Germany), Seoul (Korea)
Light color	Full color (R+G+B+W65)
Optics	15°, 30°, 60°, 125°, 15x60°
Luminous flux	500 lm
Wattage	14 W
Voltage	24 V DC, 230 V AC
Protection class	IP66
Operating temperature	-40°C ... +45°C
Lifespan	not less than 50000 hours
Control	DMX/RDM
Dimensions	104x170x116 mm (with bracket)
Weight	1,3 kg
Mounting	on an adjustable bracket
Accessories	shield
Customization	diffuser glass, internal honeycomb lattice, control/power cables of any length up to 3 m, housing and accessories painting in any RAL color, production of customized accessories, IP68 connectors

# DIMENSIONAL DRAWING


I N T I L E D

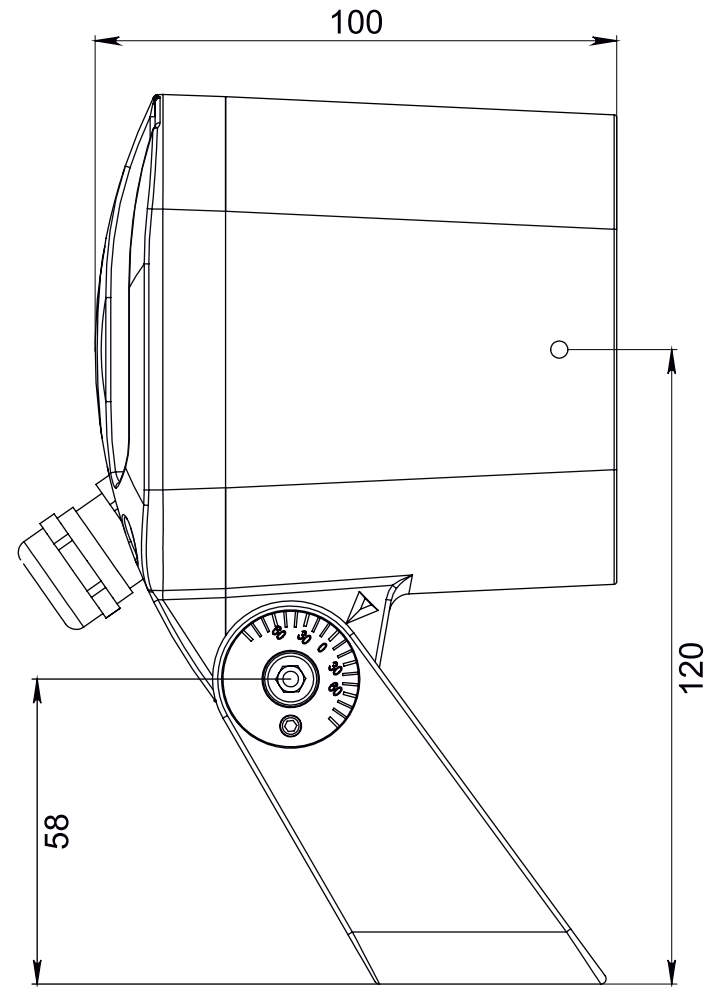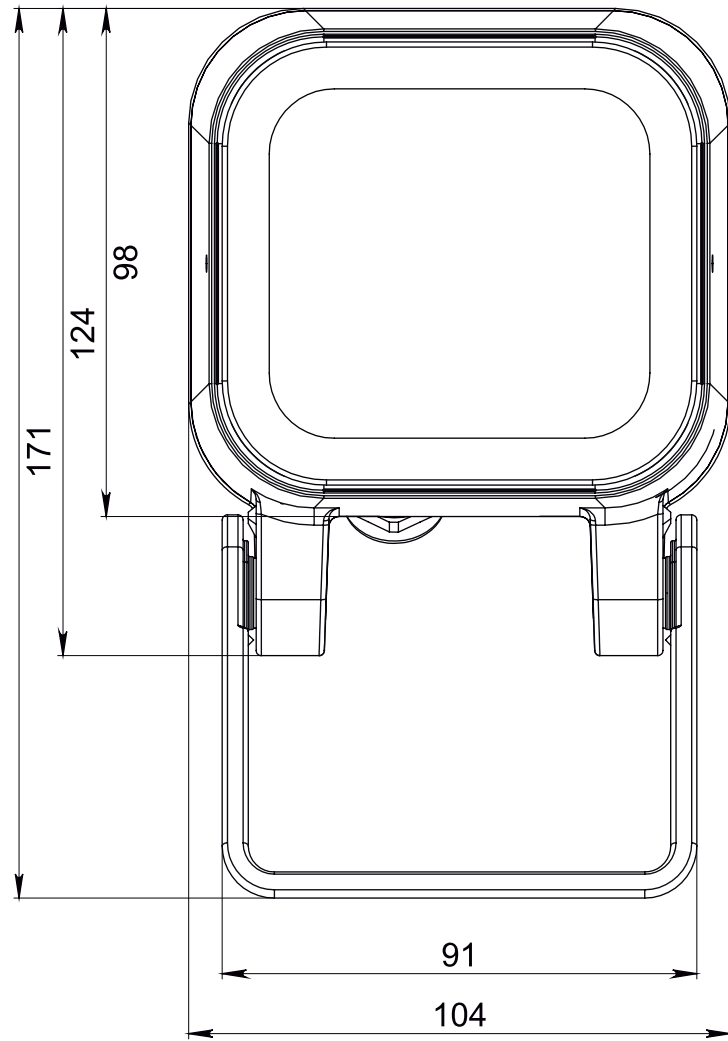

Compact accent projector


high small architectural elements (pilasters, columns)

15°, 30°

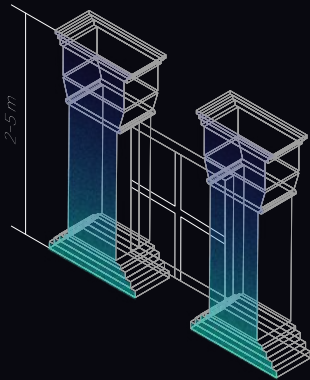


small architectural elements (relief, mascarón)

60°, 125°

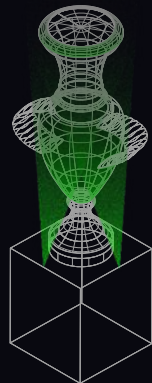


space between windows, 1-2 floors high

15x60°, 15°, 60°




landscape lighting


30°, 60°, 125°

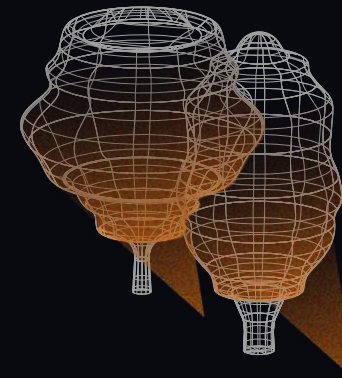


30°, 15x60°



125°

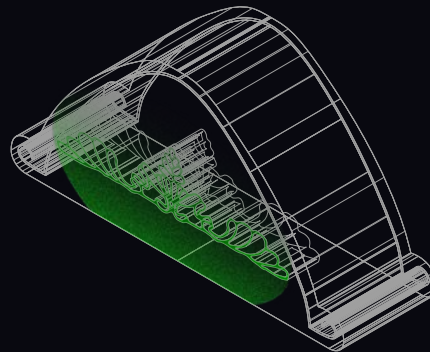

60°, 125°



30°, 60°



 [intiled.com](https://intiled.com)

 [facebook.com/intiled](https://facebook.com/intiled)

 [pinterest.com/intiled812](https://pinterest.com/intiled812)

 [instagram.com/intiled](https://instagram.com/intiled)



more on the website